


MATERIAL:

- HOUSING—DSM STANYL TE250F6 (NYLON-46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL94V-0
- CONTACTS—0.35mm THICK PHOS-BRONZE PLATED
WITH HARD GOLD AND TIN/LEAD IN
SOLDER AREA.
- SHIELD—0.25mm THICK COPPER ALLOY,
PLATED WITH NICKEL.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

OPERATING TEMPERATURE: -40°C TO +120°C
CURRENT RATING: 1.5 AMP MAX

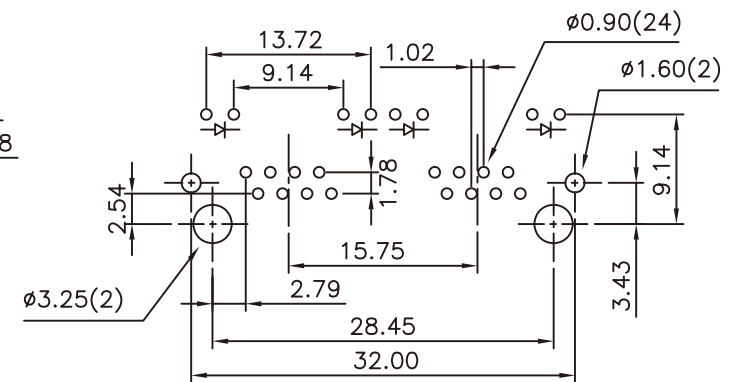

PCB LAYOUT (Ref.)

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.25
.XX ± 0.13
.XXX ±
ANG ±

P PROJECTION



ORDER INFORMATION

MJF13ULA2-KF06B3xx-0808



DESCRIPTION: 2PORTS, 8POSITION, WITH LED'S SHIELDED,
SIDE ENTRY PCB GANGED JACK