


• **MATERIALS:(RoHS Compliant)**

- Housing: Plastic Thermoplastic
P.B.T UL94V-0 Black
- Contacts: Phosphor Bronze Gold
Selective Plated
- Front Shell: Steel Nickel Plated
Over Copper
- Latch Blocks: Steel Nickel Plated
Over Copper
- Screw NUT: Copper Alloy

• **ELECTRICAL CHARACTERISTICS:**

- Contact Current Rating: 0.5 Amp
- Dielectric Withstanding Voltage: 500V AC
- Insulation Resistance: >500MΩ/Min
- Contact Resistance: 35mΩ/Max
- Operation Temperature: -55°C ~ +85°C

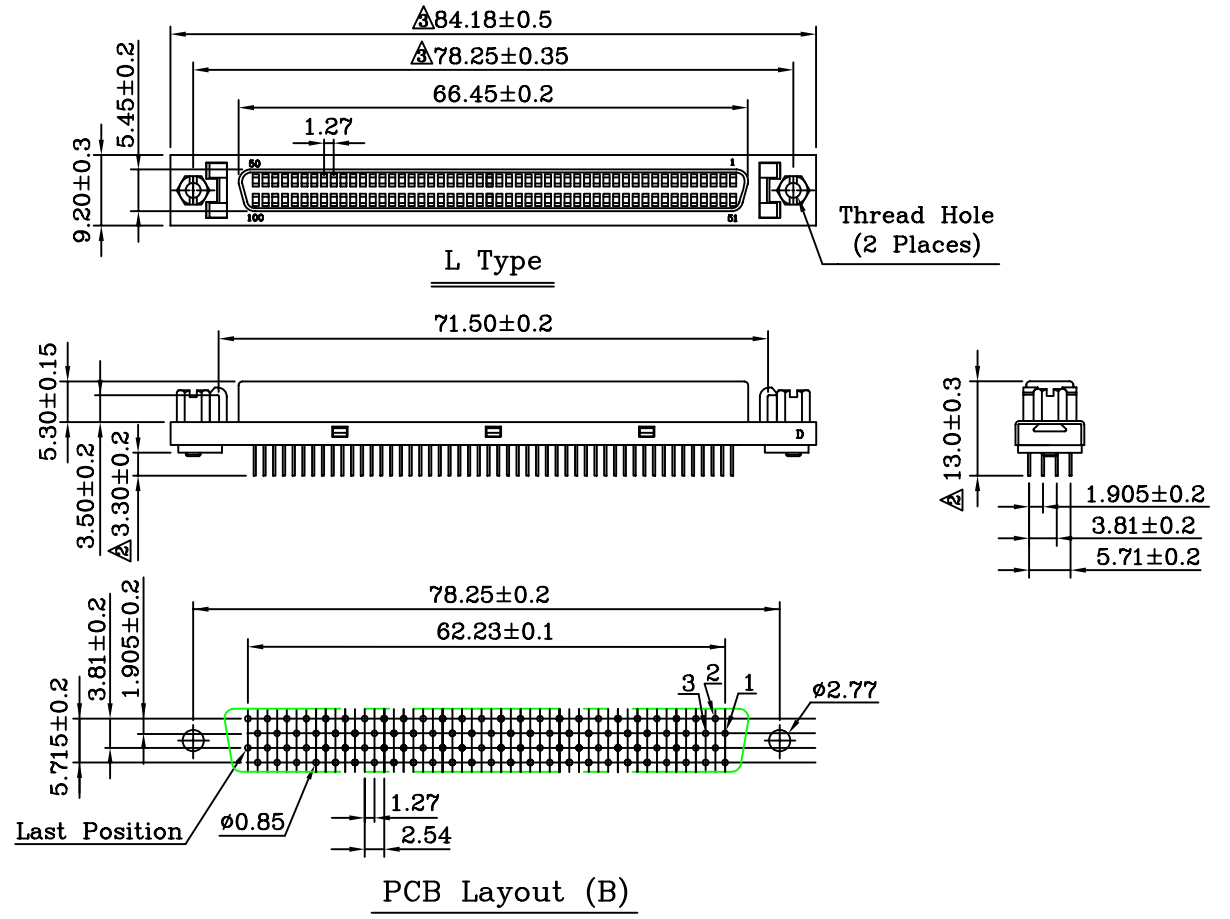

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ± 1°

PJECTION



ORDER INFORMATION

HPD-SDLJ-100-LF
SERIES | LEADFREE
| 100 WAY
| JACKSCRW
| LOCK
| DIP 180°
| FEMALE

DESCRIPTION: 1.27mm (.050") Pin Type 100Pos
Receptacles Headers Vertical Mount Type