



A=2.50*(No. of circuit-1)
B=A+5.0

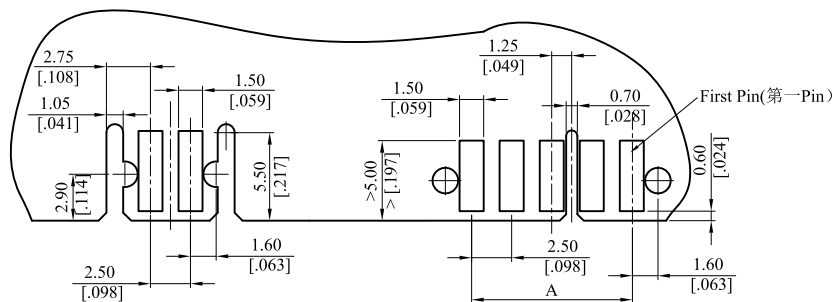

PCB LAYOUT

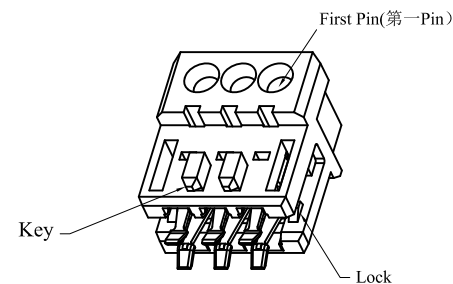

Note:
Material:
Insulator: PA66+30%GF, UL94 V-0, Nature.
Terminal: Phosphor Bronze;
Specification:
Voltage Rating: 250V;
Temperature Rating: -40°C~+110°C;

Tin plated 120~200u" over Ni 30u" overall, for AWG #22~#24.
Tin plated 120~200u" over Ni 30u" overall, for AWG #26.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°



ORDER INFORMATION

RET25-STxx-xx0xx-LF

SERIES	LEADFREE
FEMALE	KEYLOCKTYPE
IDT	02:02WAY
	15:15WAY
	22:22~24 AWG
	26:26 AWG

DESCRIPTION: Rast 2.5 Connector

www.morethanall.com

TYPE	0A	LA	30	40	3A	4A	50	5A	60 (Green)
KEY/LOCK	2-way								

TYPE	0A	LA	LB	30	40	3A	3B	4A	4B	5A	5B
KEY/LOCK	3-way										

TYPE	0A	LA	LB	LC	50	5A	5B	5C	30	3B
KEY/LOCK	4-way									

TYPE	0A	LA	LB	LC	LD	5A	5B	5C	5D	30	40
KEY/LOCK	5-way										

TYPE	0A	LA	LB	LC	LD	LE	5A
KEY/LOCK	6-way						

5B	5C	5D	5E
6-way			

TYPE	0A	LA	LB	LC	LD	LE	LF
KEY/LOCK	7-way						

TYPE	0A	LA	LB	LC	LD	LE
KEY/LOCK	8-way					

LF	LG	5A	5B
8-way			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°



ORDER INFORMATION

RET25-STxx-xx0xx-LF

SERIES

FEMALE

IDT

LEADFREE
KEYLOCKTYPE

02:02WAY

15:15WAY








22:22~24 AWG

26:26 AWG


煜倫股份有限公司

www.morethanall.com


DESCRIPTION: Rast 2.5 Connector




For example:

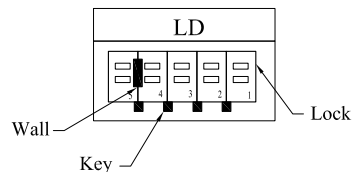

Interior Wall(内墙)



First Pin(第一Pin)

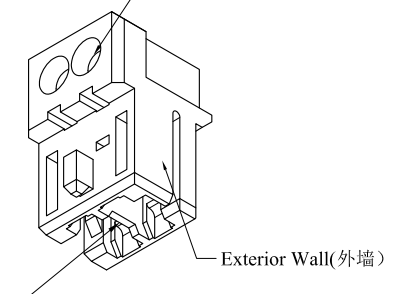

Interior Wall(内墙)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1


.XXX ± 0.10

DATE

ANG ± 1°

SIZE A4

PPOJECTION



ORDER INFORMATION

RET25-STxx-xx0xx-LF

SERIES

FEMALE

IDT

LEADFREE
KEYLOCKTYPE

02:02WAY

15:15WAY

22:22~24 AWG

26:26 AWG

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: Rast 2.5 Connector