
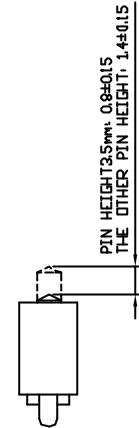



PIN HEIGHT	DIM.	DIM E
3.5mm-5.5mm		2.95
6.0mm-7.5mm		4.00

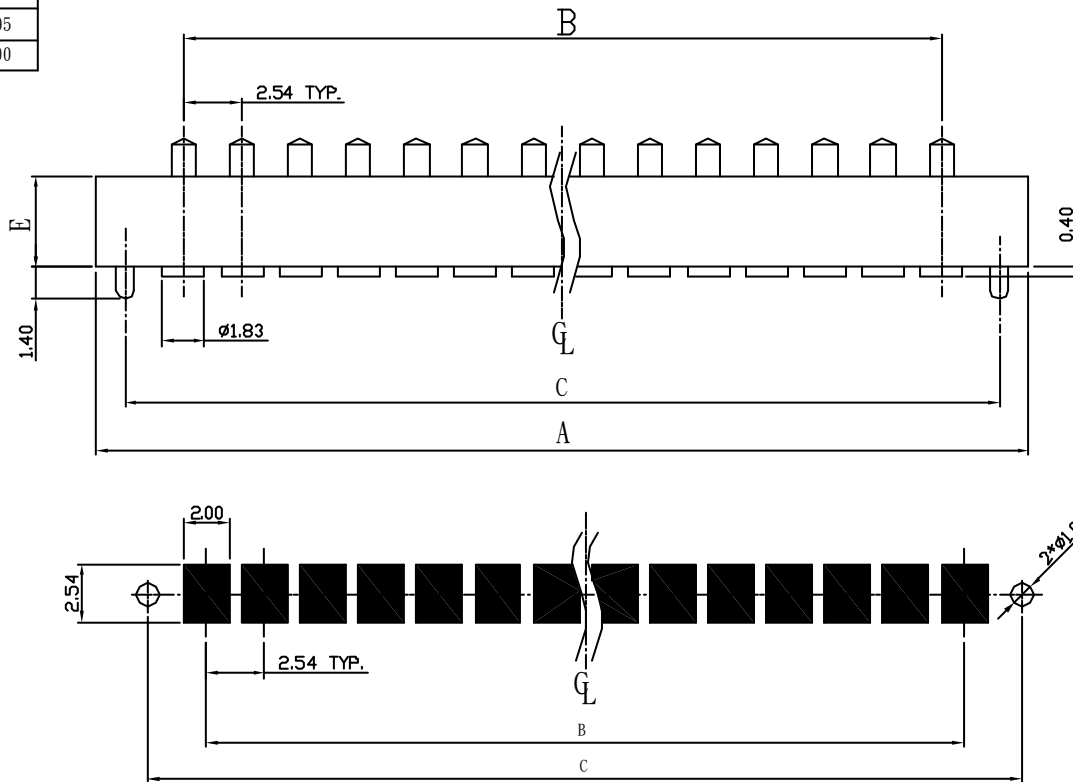

PIN No.	DIM	DIM A	DIM B	DIM C
02	10.16	2.54	7.62	
03	12.70	5.08	10.16	
04	15.24	7.62	12.70	
05	17.78	10.16	15.24	
06	20.32	12.70	17.78	
07	22.86	15.24	20.32	
08	25.40	17.78	22.86	
09	27.94	20.32	25.40	
10	30.48	22.86	27.94	
11	33.02	25.40	30.48	
12	35.56	27.94	33.02	
13	38.10	30.48	35.56	
14	40.64	33.02	38.10	
15	43.18	35.56	40.64	
16	45.72	38.10	43.18	

NOTES :

- Material :  
Housing : Thermoplastic , UL 94V-0  
Terminal : Copper Alloy
- Finish :  
Terminal : 0.5um Au / 2.5um Ni

RECOMMENDED P.C.B. LAYOUT  
LAYOUT TOLERANCE = ±0.05 mm

RoHS Compliant

TOLERANCES ARE


**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES  
煜倫股份有限公司

DRAWING BY CY  
CHECKED BY GENIUS  
UNIT / mm SCALE 1 : 1  
DATE

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

SIZE A4

P PROJECTION



ORDER INFORMATION

PGP26-VxxxP-1Xxx-LF

SERIES 180°SMT  
DIM L  
035:3.5mm  
042:4.25mm  
045:4.5mm  
050:5.0mm  
055:5.5mm  
POST  
060:6.0mm  
065:6.5mm  
070:7.0mm  
075:7.5mm  
LEADFREE  
1X02:02WAY  
1X16:16WAY

DESCRIPTION: 2.54mm PITCH PIN HEADER (SPRING PIN SINGLE TYPE)

www.morethanall.com