


Specifications:
 Current rating:5.0A AC,DC
 Voltage rating:250V AC, DC
 Contact testance:10m ohm Max
 Insulation resistance:1000M ohm Min
 Withstanding voltage:AC 1500V AC/minute
 Operating Temperature:-25°C ~ +105°C

Materials:
 Insulator:LCP (UL94V-0)
 Insulator Color:Black
 Contact :Copper Alloy
 Finish:Tin Plated

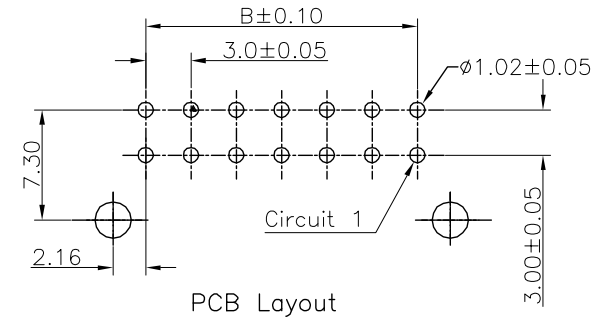

Circuits	Dimension		Circuits	Dimension	
	A	B		A	B
2	6.7	—	14	24.7	18.0
4	9.7	3.0	16	27.7	21.0
6	12.7	6.0	18	30.7	24.0
8	15.7	9.0	20	33.7	27.0
10	18.7	12.0	22	36.7	30.0
12	21.7	15.0	24	39.7	33.0

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm


SCALE 1:1

DATE

SIZE A4

PJECTION


X. ±
 .X ± 0.20
 .XX ± 0.15
 .XXX ±
 ANG ±




ORDER INFORMATION

MIF-PRZ-2Xxx-LF
 SERIES | LEADFREE
 | 2X01:02WAY
 | 2X12:24WAY
 | CLIP
 | DIP 90°
 | MALE


DESCRIPTION: 3.0mm Pitch Power Wafer Right Angle Type

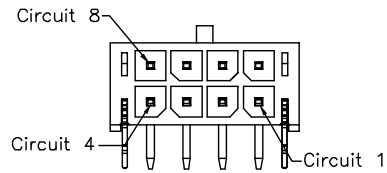


8PIN

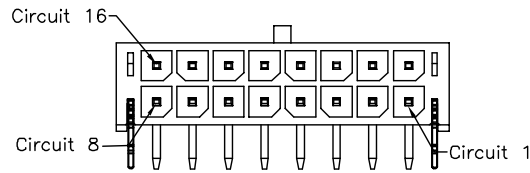


16PIN

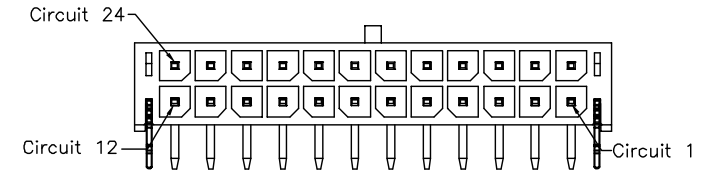


24PIN

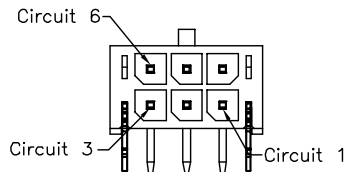


6PIN

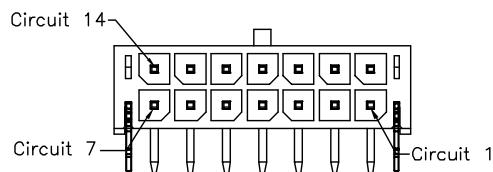


14PIN

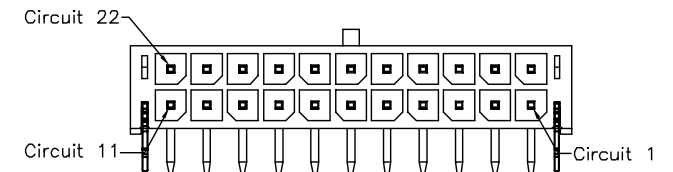


22PIN

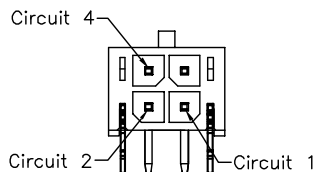


4PIN

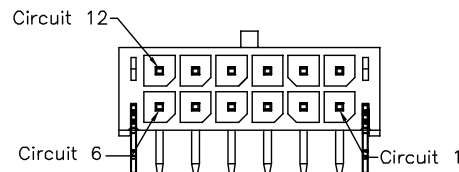


12PIN

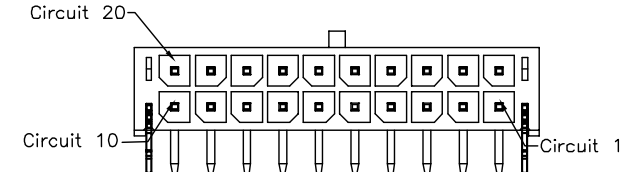


20PIN



2PIN

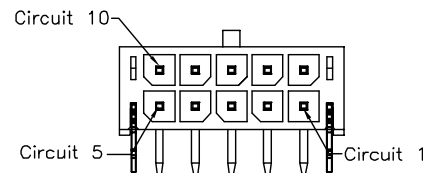

10PIN

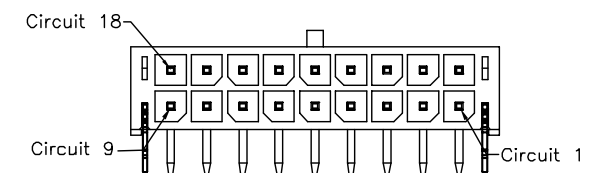

18PIN

2~24P Protection Key Drawing(Ref.)

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±

PJECTION



ORDER INFORMATION

MIF-PRZ-2Xxx-LF
SERIES | LEADFREE
| 2X01:02WAY
| 2X12:24WAY
| CLIP
| DIP 90°
| MALE

DESCRIPTION: 3.0mm Pitch Power Wafer Right Angle Type