

Technical Data:

Material:



- Contact : Brass
- ▲ ● Wire guard : stainless steel
- Surface of solder tail : Tin plated
- ▲ ● Insulator body(housing) :PBT(Glass filled)(UL94V-0)
- Insulator Level :Polyamide(Glass filled)(UL94V-0)

Electrical



- Voltage rating : 300VAC
- Current rating : 10Amps/way max
- Contact resistance : 20mΩ(max)
- Insulation resistance : 1000MΩ min.
- Wire range : 14-24AWG

Mechanical:

- Operating temperature : -55°C to +105°C
- Test temperature= 250°C 5 seconds max.

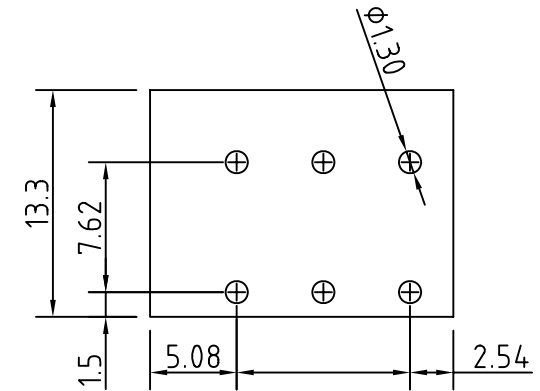

P.C.B. LAYOUT

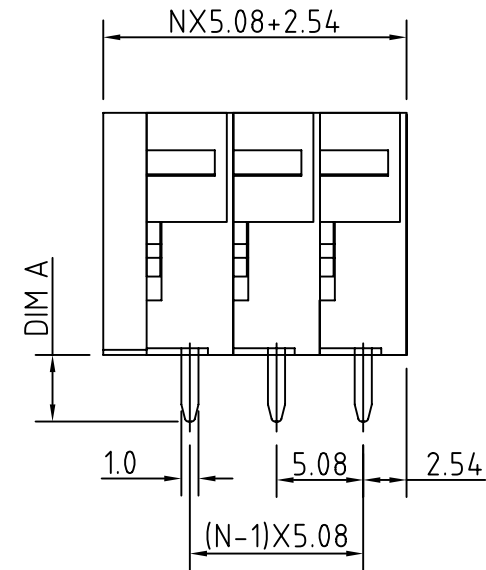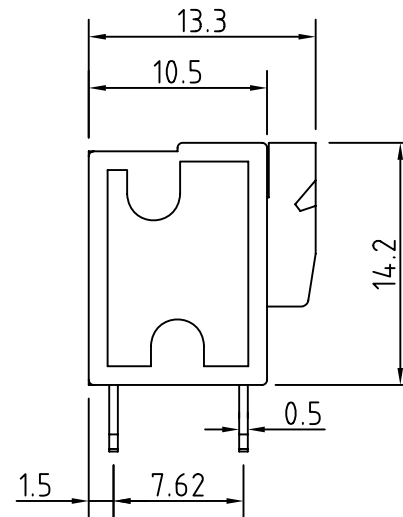

N=Number of contacts

DIM A Length

Code	DIM A
0	3.9mm
1	3.5mm

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



ORDER INFORMATION

TBX051-D14-xx-LF

SERIES | LEADFREE  
02~24WAY  
HIGH 14.2mm  
DIP 180°

DESCRIPTION: