




**Material:**

Housing: 30% Glass filled PBT UL94V-0.  
Contacts: Brass.

**Electrical Characteristics:**

Current Rating: 5.6AMP.  
Dielectric Withstanding Voltage: AC1000V For 1 minute.  
Insulator Resistance: 1000MΩ min. at DC 500V.  
Contact Resistance: 30mΩ max. at DC 100mA.  
Operating Temperature: -55°C ~ +105°C .

**\*RoHS Compliant**

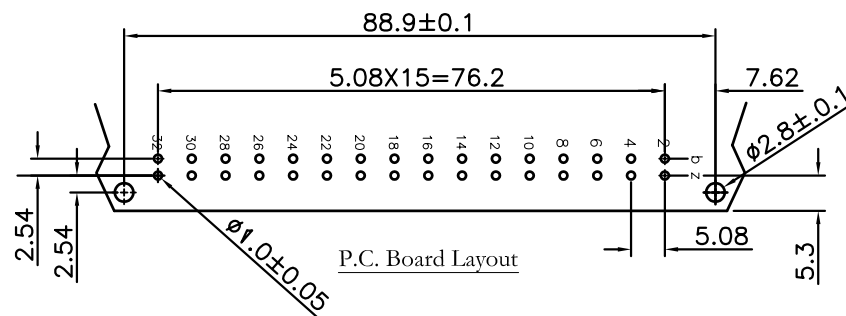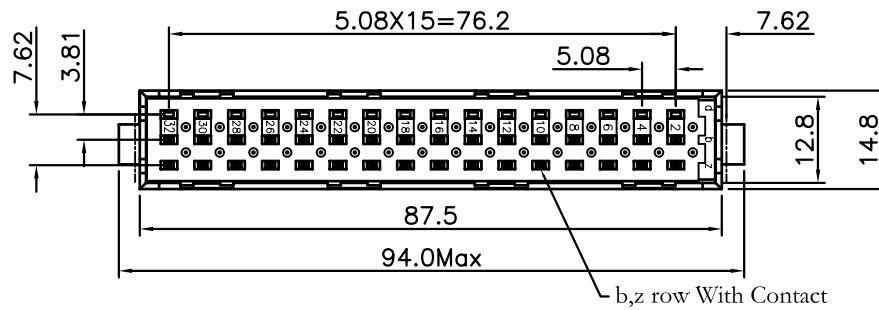

**RoHS Compliant**

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE


SIZE A4

PJECTION

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



**ORDER INFORMATION**

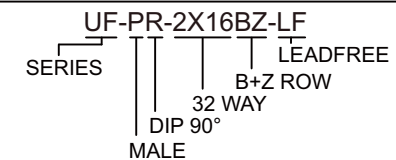

DESCRIPTION: