

Recommended P.C.B Layout

### MATERIAL

Insulator : NY6T

Contact Pin : Phosphor Bronze

### SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500Vfor one minute

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±0.30

UNIT / mm

SCALE 1 : 1

.XX±0.20

DATE

.XXX±


ANG ±3°

煜倫股份有限公司


www.morethanall.com

SIZE A4

PPOJECTION



### ORDER INFORMATION

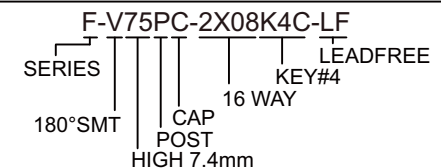

DESCRIPTION: FEMALE HEADER 2.54\*2.54mm SMT TYPE, DUAL ROWS HEIGHT 7.1mm, CAP+TUBE