


P.C.B LAYOUT
TOP VIEW

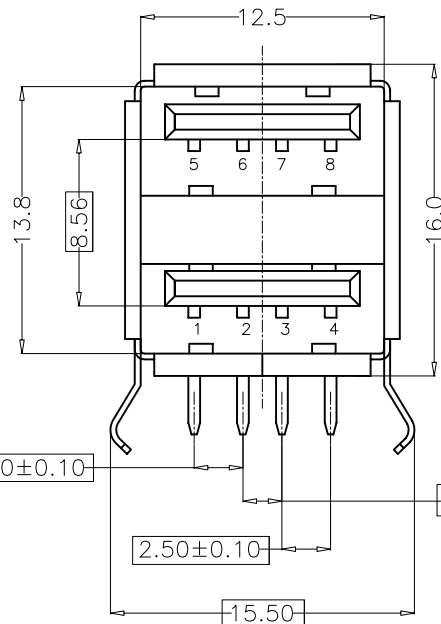

NOTES:

1.MATERIAL

- 1.1 CONTACTS: PHOSPHOR BRONZE, GOLD/TIN PLATED
- 1.2 SHELL: BRASS, NICKEL PLATED
- 1.3 INSULATOR: PBT UL 94V-0

2.ELECTRICAL

- 2.1 TERMINATION RESISTANCE: 30m OHMS MAX
- 2.2 INSULATION RESISTANCE: 2000M OHMS MIN AT 250V DC
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE: AC 750V/min.R.M.S.

3.MECHANICAL

- 3.1 MATING FORCE: 35 NEWTONS MAX
- 3.2 UNMATING FORCE: 10 NEWTONS MIN

4.ENVIROMENTAL

- 4.1 TEMPERATURE RANGE: -50°C ~ +105°C
- 4.2 RECOMMENDED PC BORAD THICKNESS: 1.57MM

5.重點尺寸標示: [X] [X]

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.20


DATE

.XXX ±

ANG ± 2°

SIZE A4

P PROJECTION



ORDER INFORMATION

USBB1-FRWH-4A-LF

SERIES

LEADFREE

4 PIN A TYPE

WHITE

DIP 90°

FEMALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: USB A TYPE 母雙層半金白銅殼鍍銀 不加彈 內扣式