



Section:A-A

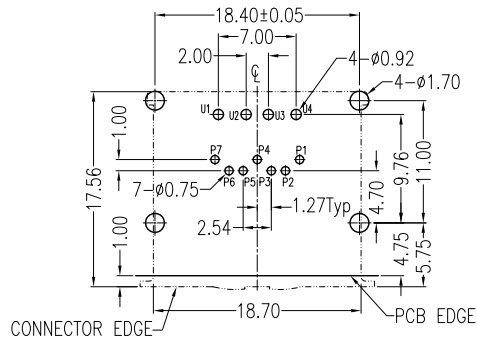

P.C.B Layout t=1.60mm

Top View



3D Drawing

NOTES:

Material

Housing : PBT, UL 94-0 Rated

Retainer : Nylon66, UL 94-0 Rated

Contact(eSATA) : Brass,Gold Plating over Nickel on contact area; Tin Plating on Solder Tail.

Contact(USB): Phosphor bronze,Gold Plating over Nickel on contact area; Tin Plating on Solder Tail.

Shell(Inside): SUS430.

Shell(Outside) : Brass, Nicke Plating.

***e SATA Electrical Specification**

Current Rating: 1.5 Ampere per contact

Contact Resistance: 30mOHM Max

Insulation Resistance: 1000M OHM MIN

Dielectric Withstanding Voltage:500 VAC For 1 minute.

***USB Electrical Specification**

Rated Voltage and Current : 1.5A at 250V AC min;

Contact Resistance: 30 Milliohms max.

Insulation Resistance: 1000 megohms min.

Dielectric Withstanding Voltage: 500 VAC For 1 minute.

***Environmental**

Operating Temperature : -55°C to +125°C.

Unit:mm

Standard	Dim A
UBESA-ARN-4A07	2.15

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION


X, ±

.X ±

.XX ±

.XXX ±

ANG ±



ORDER INFORMATION

UBESA-ARN-4A07-LF

SERIES

LEADFREE

4 PIN A TYPE TO 07 PIN

NUT

DIP 90°

FEMALE TO MALE

DESCRIPTION: USB+eSATA (With Flange)