
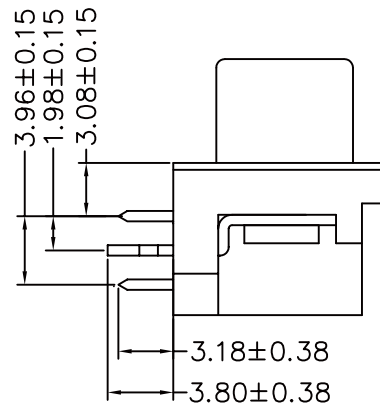


P.C.B. LAYOUT

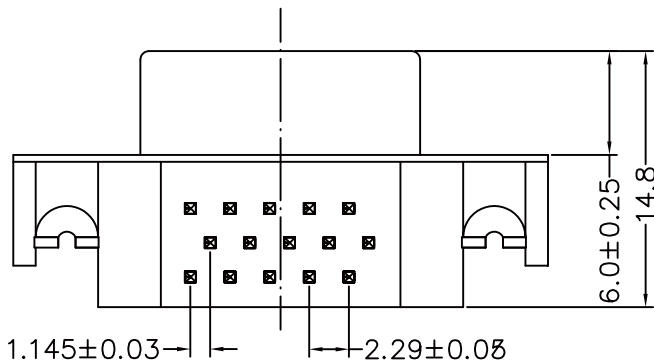

NOTES:

1.MATERIAL:

- 1.1 Insulator: PBT+30%Glass Fiber (UL94V-0)
- 1.2 Contact: Brass
- 1.3 Contact Plated: Gold/Tin Plated
- 1.4 Shell: Steel, Nickle Plated
- 1.5 SCREW: BRASS, Nickle Plated

2.SPECIFICATION:

- 2.1 Current Rate: 5 Amps
- 2.2 Insulator Resistance: 5000MΩ Min. at 500V DC
- 2.3 Dielectric Strength: 1000V Per minute
- 2.4 Operation Temperature: -55°C to+105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm

SCALE 1:1

DATE

SIZE A4

X. ±
.X ± 0.50
.XX ± 0.30
.XXX ±
ANG ± 2°

PJECTION



ORDER INFORMATION

HDR30-SSNH6xx-15S9-LF

SERIES | | | | | LEADFREE
FEMALE | | | | | SHORT #9
SEMI GOLD | | | | | 15WAY
NUT | | | | | BL:BLUE
HEX SCREW 5.8mm | | | | | BK:BLACK

DESCRIPTION: HDR 15母3.08鉚附半金 3.18 縮9 661C 附螺絲5.8*13.0 無毒