
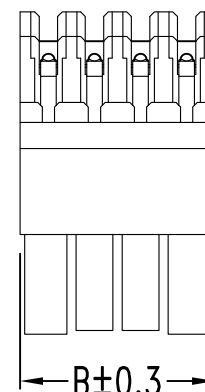



Features:

- 4 ~ 24 circuits available
- Plastic material: LCP
- Contact material: Phosphor bronze
- Terminal positioning strip: Mylar, nature
- Recommended PCB thickness: .062"(1.57mm)



Specification:

- Voltage rating: 250V AC(RMS) or DC
- Current rating: 5A AC, DC
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C



Dimensional Information (mm)

Circuits	N = 4, 6	N = 8 ~ 24
Dim. C	0	$3 \times (N / 2 - 2)$
Dim. A	$3 \times (N / 2 - 1)$	
Dim. B	$A + 3.7$	

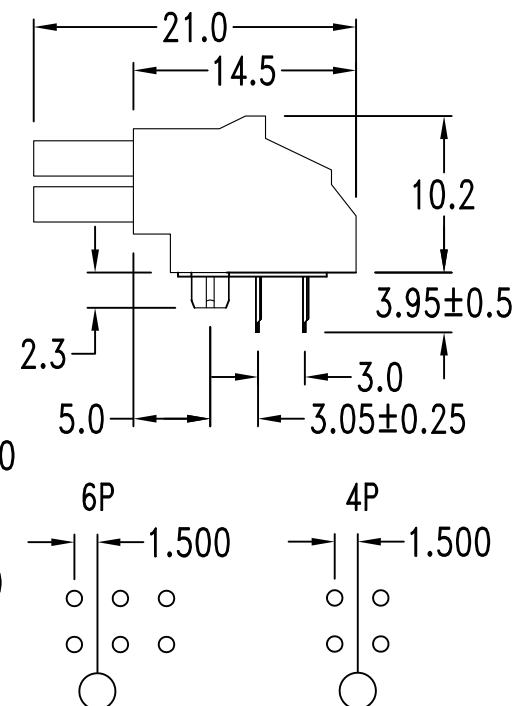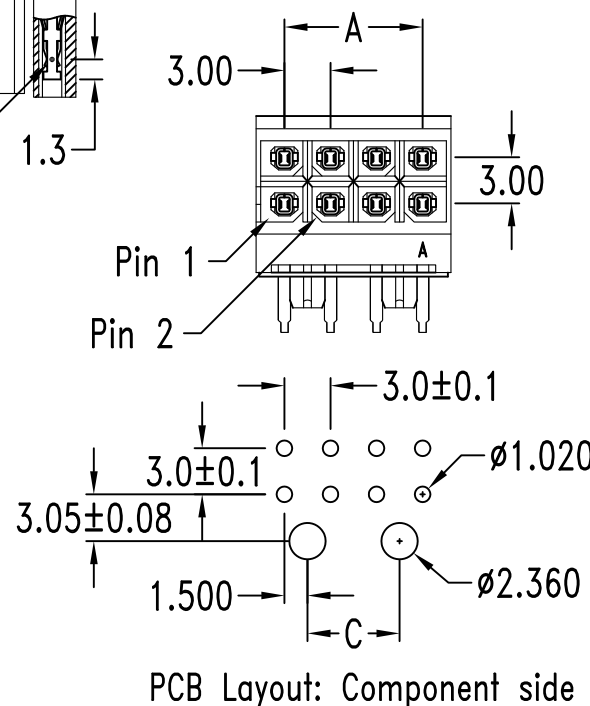

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±



ORDER INFORMATION

MIFB-SRP-2Xxx-LF

SERIES

LEADFREE

2X02:04 WAY

2X12:24 WAY

FEMALE

POST

DIP 90°

DESCRIPTION:

www.morethanall.com