


适用扁平线

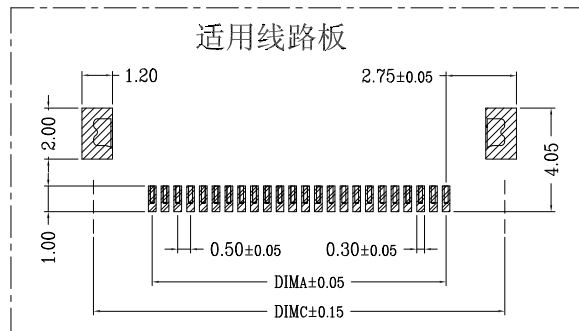

序号	品名	材质
①	0.5后压卧式胶芯 (H.L. 5)	LCP UL94V-0 本色
②	0.5后压卧式端子 (H.L. 5)	磷青铜/表面镀镍 镀金
③	0.5后压卧式1代后盖 (H.L. 2)	LCP UL94V-0 本色
④	0.5后压卧式弹片 (H.L. 5)	磷青铜/表面镀镍

CKT	A	B	C	CKT	A	B	C
4	1.50	2.52	6.10	33	16.00	17.02	20.60
5	2.00	3.02	6.60	34	16.50	17.52	21.10
6	2.50	3.52	7.10	35	17.00	18.02	21.60
7	3.00	4.02	7.60	36	17.50	18.52	22.10
8	3.50	4.52	8.10	37	18.00	19.02	22.60
9	4.00	5.02	8.60	38	18.50	19.52	23.10
10	4.50	5.52	9.10	39	19.00	20.02	23.60
11	5.00	6.02	9.60	40	19.50	20.52	24.10
12	5.50	6.52	10.10	41	20.00	21.02	24.60
13	6.00	7.02	10.60	42	20.50	21.52	25.10
14	6.50	7.52	11.10	43	21.00	22.02	25.60
15	7.00	8.02	11.60	44	21.50	22.52	26.10
16	7.50	8.52	12.10	45	22.00	23.02	26.60
17	8.00	9.02	12.60	46	22.50	23.52	27.10
18	8.50	9.52	13.10	47	23.00	24.02	27.60
19	9.00	10.02	13.60	48	23.50	24.52	28.10
20	9.50	10.52	14.10	49	24.00	25.02	28.60
21	10.00	11.02	14.60	50	24.50	25.52	29.10
22	10.50	11.52	15.10	51	25.00	26.02	29.60
23	11.00	12.02	15.60	52	25.50	26.52	30.10
24	11.50	12.52	16.10	53	26.00	27.02	30.60
25	12.00	13.02	16.60	54	26.50	27.52	31.10
26	12.50	13.52	17.10	55	27.00	28.02	31.60
27	13.00	14.02	17.60	56	27.50	28.52	32.10
28	13.50	14.52	18.10	57	28.00	29.02	32.60
29	14.00	15.02	18.60	58	28.50	29.52	33.10
30	14.50	15.52	19.10	59	29.00	30.02	33.60
31	15.00	16.02	19.60	60	29.50	30.52	34.10
32	15.50	16.52	20.10				

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: -25° C~85° C.
3. 额定电压: 50V, AC/DC(等效).
4. 接触电阻: ≤0.03Ω.
5. 绝缘电阻: ≥500MΩ
6. 产品料号:

5R+6&RPSOLDQW

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY &<

CHECKED BY \*(1,86


UNIT / mm SCALE 1 : 1

'\$7(

6,=(\$

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PPOJECTION



25' (5 ,1)250\$7,21

FPV-WRD15GF3-xx-LF  
SERIES | LEADFREE  
04-60WAY  
CABLE t=0.3mm  
90°SMT | GOLD  
ROTARY ZIF | HIGH 1.5mm  
DUAL CONTACTS

煜倫股份有限公司

ZZZPRUHWKDQDOOFR

DESCRIPTION: FPC0.5Pitch-1.5H前插后掀成品图