





**MATERIALS:**

- HOUSING-PBT POLYESTER UL94V-0  
MIXED GLASS FIBER,  
STANDARD COLOR-BLACK
- CONTACTS-0.45mm DIM. PHOS-BRONZE PLATED  
WITH HARD GOLD.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS  
PART 68,SUBPART F.

Mating Force: 8 Contacts 2.3 Kgf max

Mating Durability: Mate and unmate for 500  
cycles at a rate of 20~30  
cycles per minute without load.

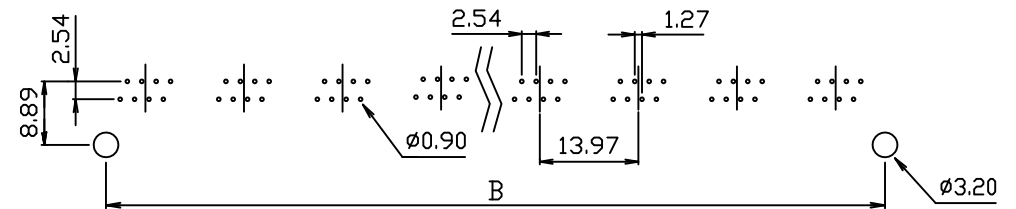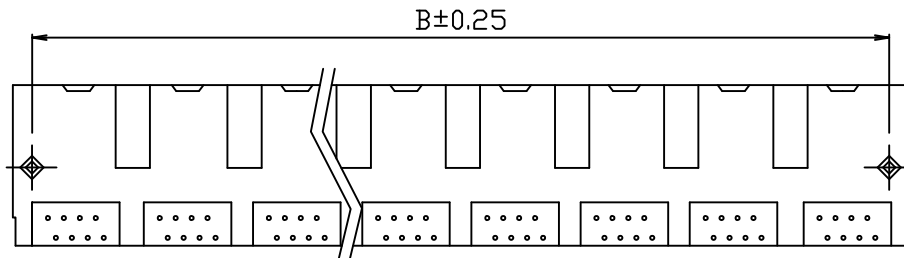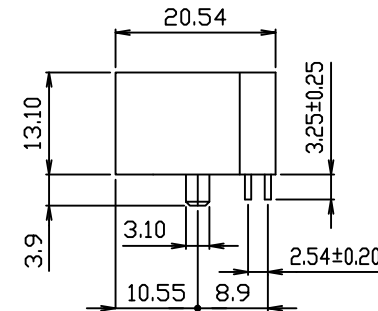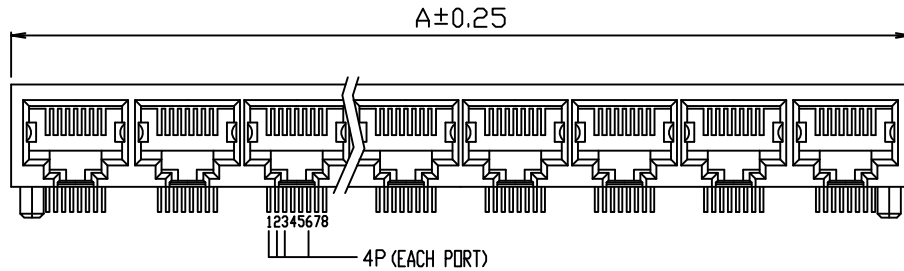

PC Board Layout

PORTS DIM	2	3	4	5	6	7	8	9	10	11	12
A	30.48	44.45	58.30	72.39	86.36	100.33	114.30	128.27	142.24	156.21	170.18
B	25.40	39.37	53.34	67.31	81.28	95.25	109.22	123.19	137.16	154.13	165.10

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



**ORDER INFORMATION**

MJ13Ax-KX06-0808-LF

SERIES | 8P8C | LEADFREE  
2:2 PORTS | 06u" GOLD | NON EAR  
12:12 PORTS | BLACK

DESCRIPTION: 2 TO 12 PORTS 8 POSITION SHIELDLESS  
SIDE ENTRY PCB GANGED JACK