


Material:

\* Insulation: Glass filled polyester UL 94V-0  
Color White(Nature)

\* Contact: Brass

Plating : 3.05μm(120μ") Min. Tin  
over 0.76μm(30μ") Nickel

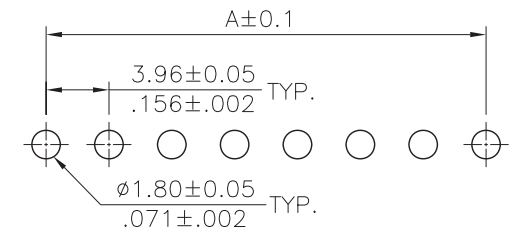

Recommended P.C. Board Layout

A = 3.96 x No. of Spaces

B = A + 3.96

\* Available in 2 through 24 circuits

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.38  
.XX ± 0.25  
.XXX ± 0.10  
ANG ±

PJECTION



ORDER INFORMATION

KT-DB-xx-LF  
SERIES | LEADFREE  
02~24WAY  
BREAKAWAY  
DIP 180°

DESCRIPTION: