
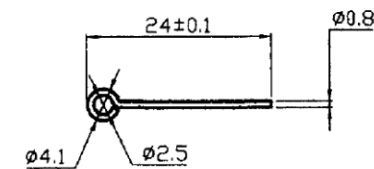


PCB/MOUNTING LAYOUT

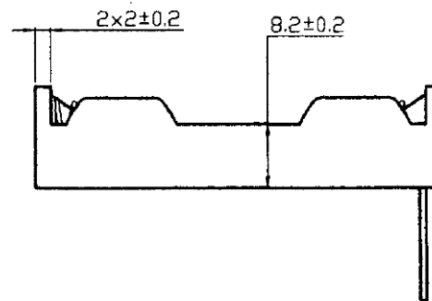

PIN

SPECIFICATION

- (1) PIN: $\varnothing 0.8 \times 24 \text{MM}$
- (2) MATERIAL: P.P. RESIN ,BLACK COLOR
- (3) SPRING: #4 0.6MM 65C SPRING WIRE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PPROJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

BTH-DP-2AAA-LF
SERIES | LEADFREE
2AAA TYPE
POST
DIP 180°

DESCRIPTION: