

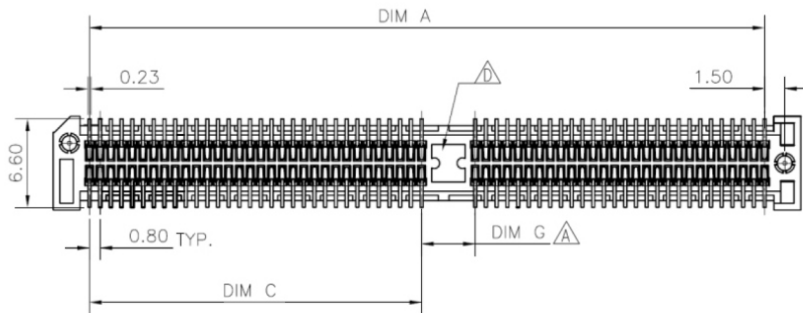
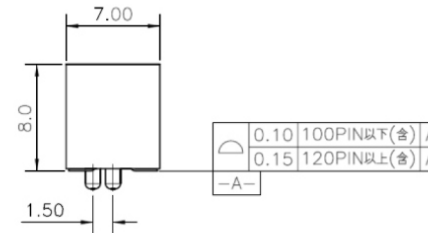


- NOTES:
- MATERIAL:
 - HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:BLACK.
 - CONTACT: COPPER ALLOY
 - FINISH:
 - CONTACT: GOLD FLASH PLATING OVERALL. 50 μ " MIN. NICKEL UNDERPLATING OVERALL.
 - REFLOW SOLDER CAPABLE TO 260°C PER **Morethanall** SPEC.
 - IF CKT AT 20-70PIN DID NOT DEFEND THE POLARIZATION KEY;
 - IF CKT \geq 80PIN HAVE ALREADY DEFEND THE POLARIZATION

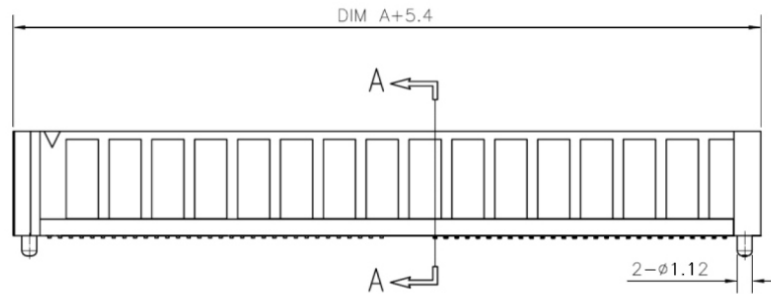

SECTION A-A

Part No.	CKT	Dim A	Dim C	Dim D	Dim F	DIM G	DIM H	KEY
E08-VPC-040	40	15.20	N/A	17.20	N/A	N/A	N/A	WITHOUT
E08-VPC-100	100	42.40	20.80	44.40	22.80	4.00	2.40	WITH
E08-VPC-120	120	50.40	24.80	52.40	26.80	4.00	2.40	WITH
E08-VPC-140	140	58.40	28.80	60.40	30.80	4.00	2.40	WITH
E08-VPC-160	160	66.40	32.80	68.40	34.8	4.00	2.40	WITH
E08-VPC-200	200	82.40	40.80	84.40	42.8	4.00	2.40	WITH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. \pm 0.30


.X \pm 0.30

.XX \pm 0.20

.XXX \pm 0.10

ANG \pm 1°

P PROJECTION



ORDER INFORMATION

E08-VPC-xxx-LF
SERIES | | LEADFREE
| | 040~200WAY
| MYLAR
| POST
| 180°SMT

DESCRIPTION: