

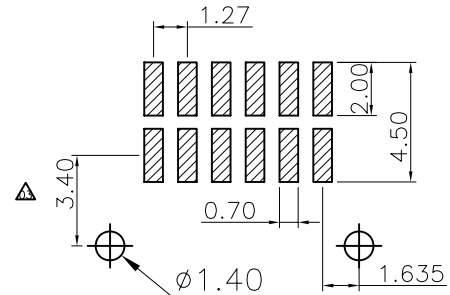


Recommended P.C.Board Layout
(Tolerance: ± 0.05)

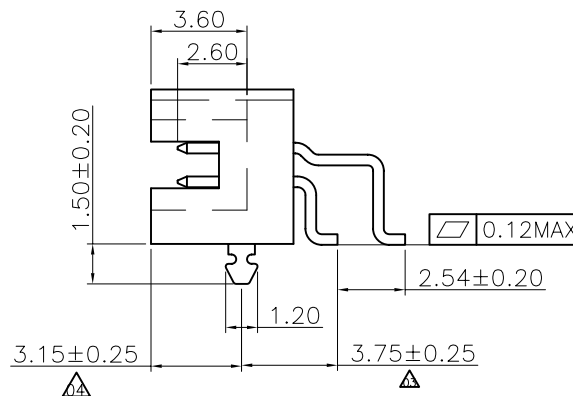

Specifications
 Current Rating: 1.0Amp
 Insulation Resistance: 1000M Ω Min.
 Dielectric Withstanding Voltage: 300VAC
 Contact Resistance: 20m Ω Max.
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature
 Thermoplastic, UL 94V-0 LCP(Nylon) or the equivalent material

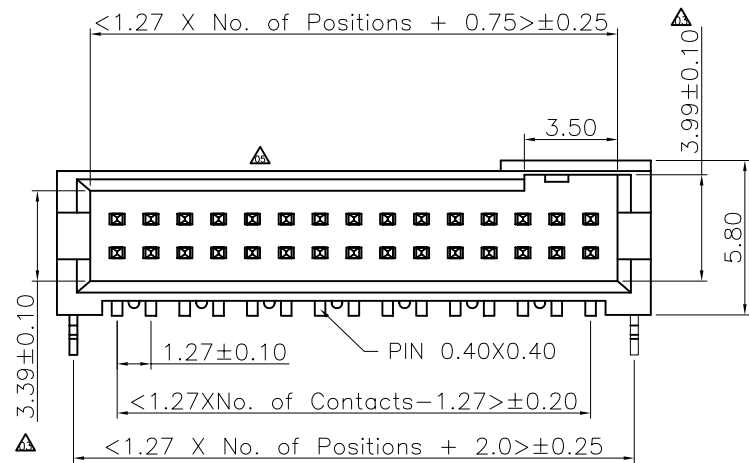

No. of Pins per Row
 05, 06, 08, 10, 15, 20, 22, 24, 30

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PJECTION

X \pm 0.30
 .X \pm 0.25
 .XX \pm 0.15
 .XXX \pm 0.10
 ANG \pm



ORDER INFORMATION

PAB-WZ-2Xxx-LF
 SERIES | LEADFREE
 | 2X05:10WAY
 | 2X30:60WAY
 | CLIP
 | 90°SMT

DESCRIPTION: 1.27 BOX HEADER DUAL ROWS SMT TYPE SIDE ENTRY