
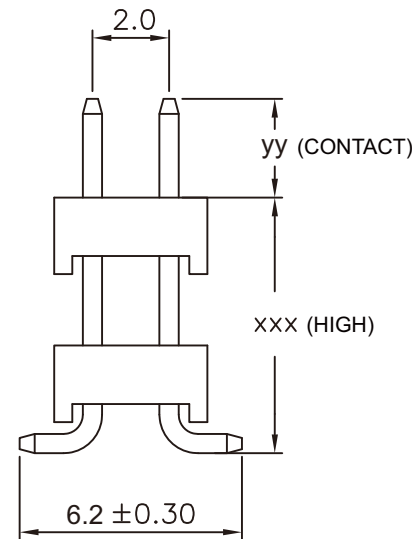


### Specifications


Current Rating: 1Amp  
 Insulation Resistance: 5000MΩ Min.  
 Dielectric Withstanding: 500VAC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

### Materials

Contact Material: Copper alloy  
 Insulator Material: Polyester, UL94V-0  
 NYLON-6T

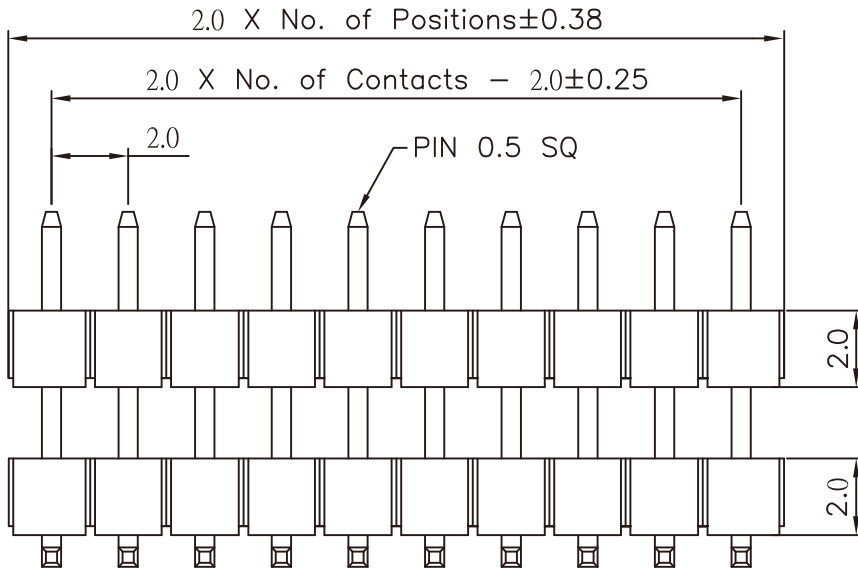

### Recommended P.C.Board Layout

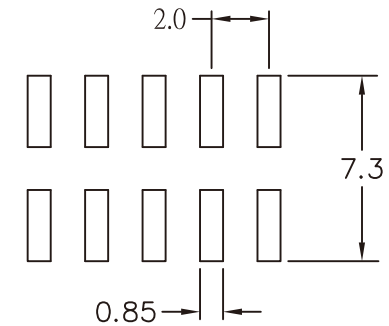

### RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm  
 DATE

SCALE 1:1


SIZE A4

P PROJECTION

X, ±  
 .X ± 0.38  
 .XX ± 0.25  
 .XXX ± 0.13  
 ANG ±



### ORDER INFORMATION

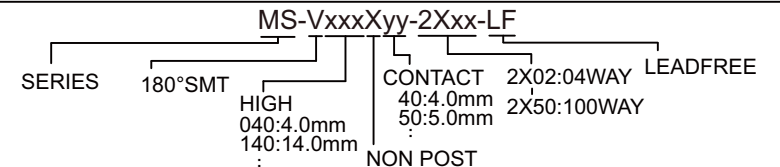

DESCRIPTION: 2.0 PIN HEADER DUAL ROW SMT TYPE BASE 2.54