
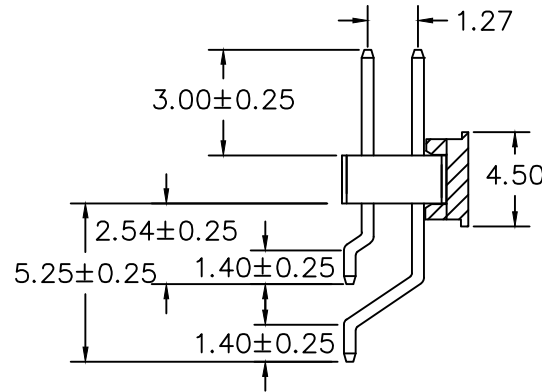


RECOMMENDED P.C.B LAYOUT

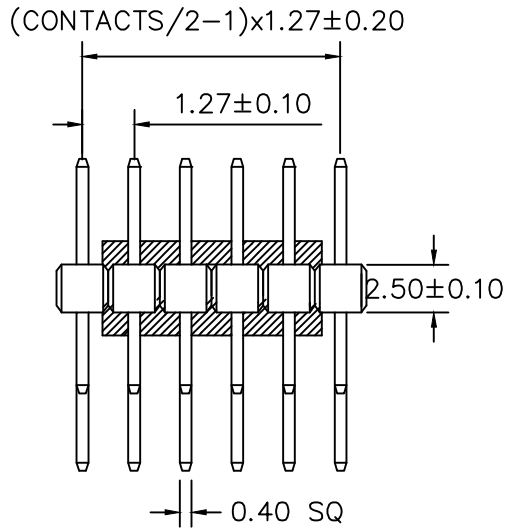

CONTACTS	2X21
2X2	2X22
2X3	2X23
2X4	2X24
2X5	2X25
2X6	2X26
2X7	2X27
2X8	2X28
2X9	2X29
2X10	2X30
2X11	2X31
2X12	2X32
2X13	2X33
2X14	2X34
2X15	2X35
2X16	2X36
2X17	2X37
2X18	2X38
2X19	2X39
2X20	2X40

MATERIAL
 HOUSING : NYLON 6 T, UL94V-0
 CONTACT : COPPER ALLOYS
 PLATED : GOLD-FLASH
 COLOR : BLACK

SPECIFICATION
 CURRENT : 1A
 OPERATING TEMPERATURE : -55 °C TO +105 °C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN
 WITHSTANDING VOLTAGE : 500V AC MIN

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ±
 ANG ± 5°

PJECTION




ORDER INFORMATION

PA-WX30CR-2Xxx-LF
 SERIES | | | | LEADFREE
 90°SMT | | | | 2X02:04 WAY
 NON POST | | | | 2X40:80 WAY
 REEL
 CAP
 CONTACT 3.0mm

煜倫股份有限公司

www.morethanall.com

DESCRIPTION:

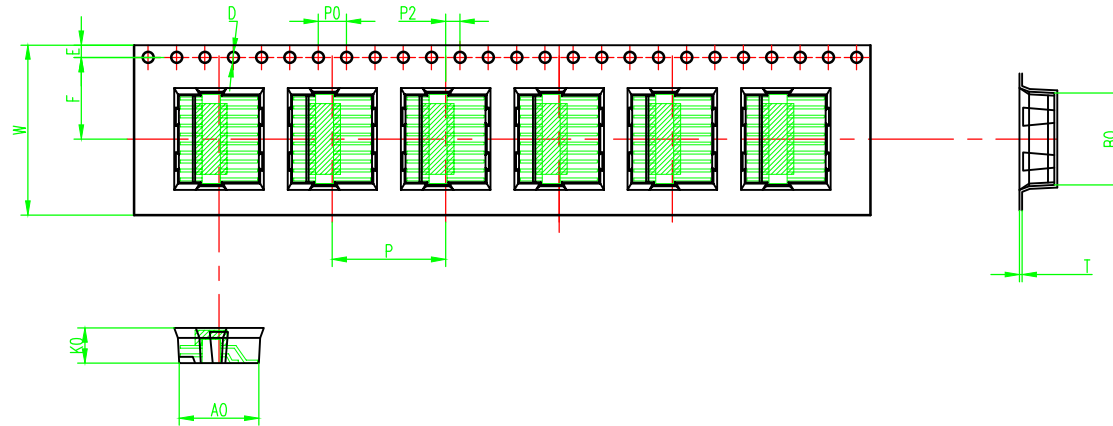

ITEM	W	A0	B0	K0	E	F	P	P0	P2	D	T
DIM	24.0+0.3	11.24±0.3	12.96±0.3	4.95±0.3	1.75±0.1	11.5±0.1	16.0±0.1	4.00±0.1	2.00±0.1	∅1.5+0.1	0.4±0.05

note:

1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1mm in 100mm.
3. A0 and B0 measured on a plane 0.4mm above the bottom of the pocket.
4. K0 measured on a plane on the inside bottom of the pocket to the top surface of the carrier.
5. All dimensions meet EIA-481-3 requirements.
6. Component load per 13" reel: 700 PCS (REF.)
7. ± 0.2 mm unless otherwise noted.
8. Packing length per 13" reel: 11.80 Meter

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ± 5°


PJECTION



ORDER INFORMATION

PA-WX30CR-2Xxx-LF
SERIES | LEADFREE
90°SMT | 2X02:04 WAY
NON POST | REEL | 2X40:80 WAY
CAP | CONTACT 3.0mm

DESCRIPTION:

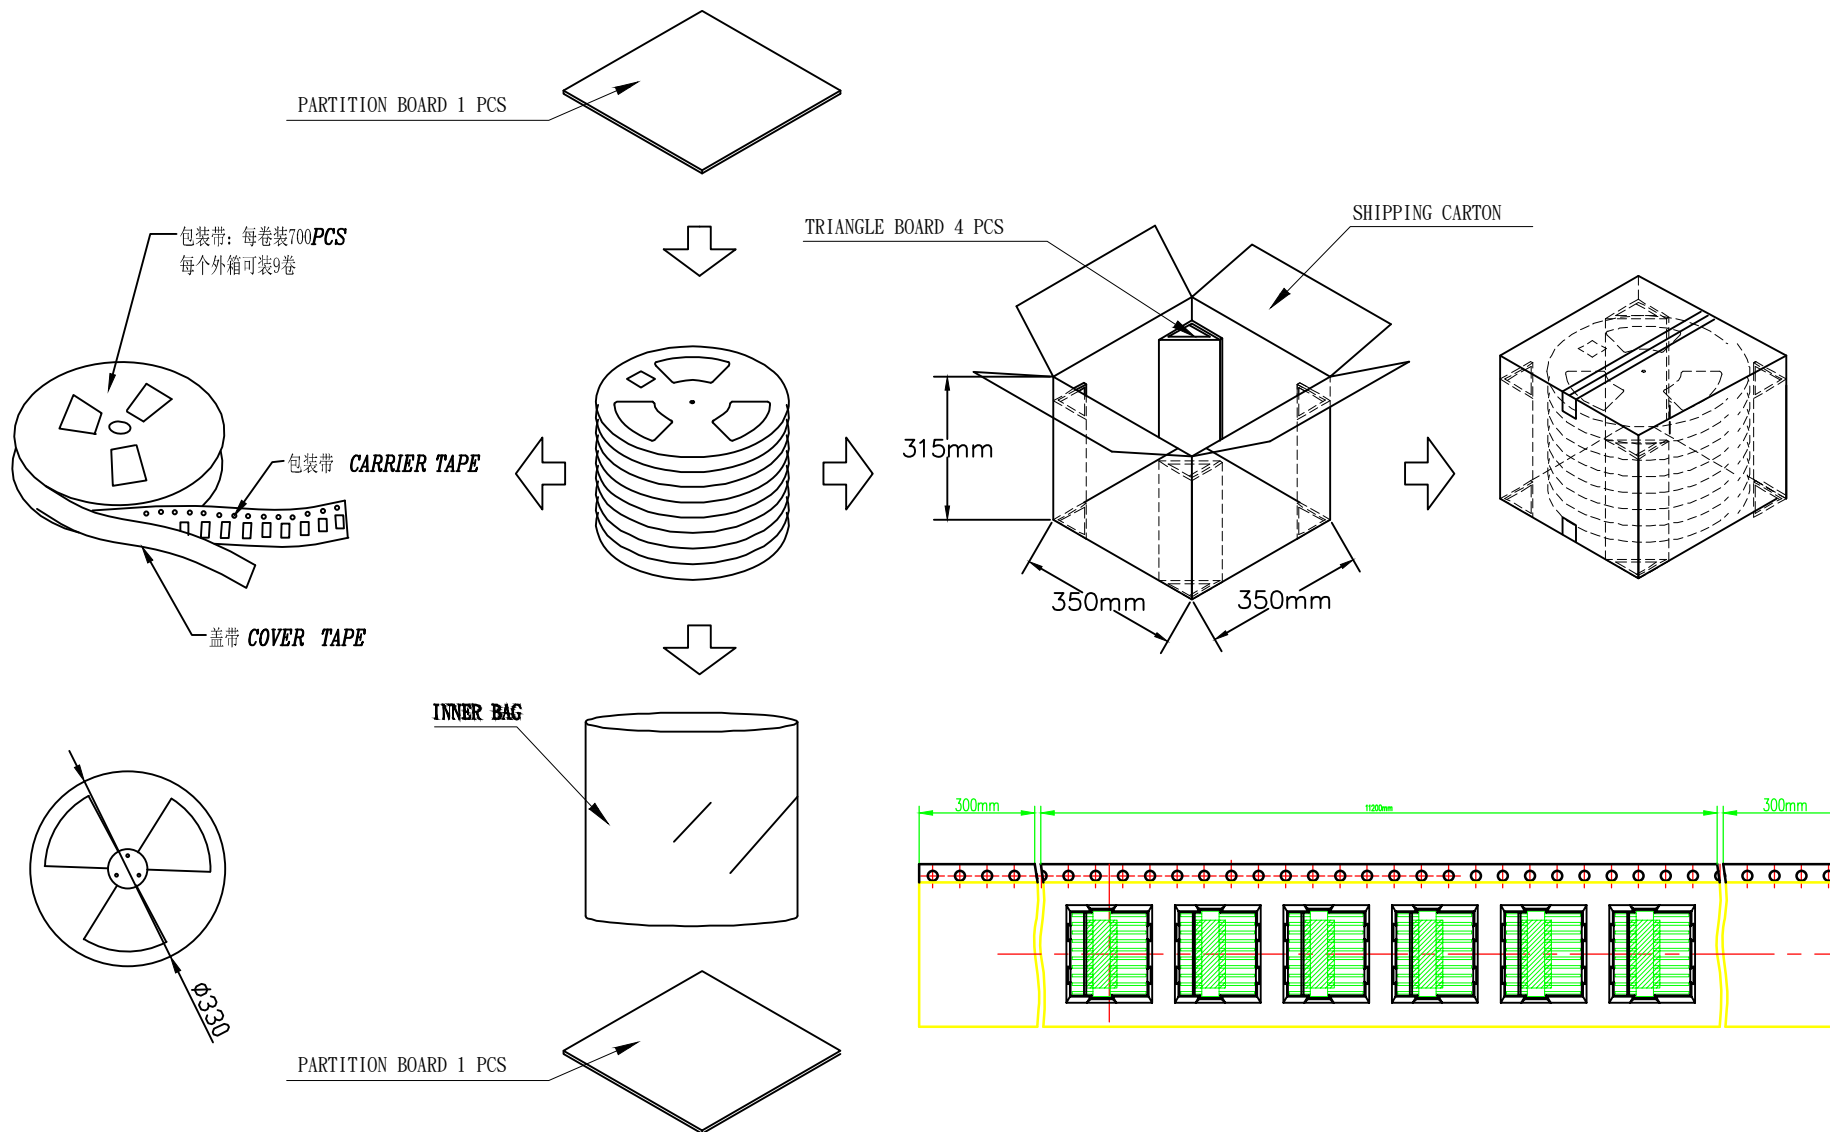

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ± 0.38

UNIT / mm

SCALE 1 : 1

.XX ± 0.25

DATE

.XXX ±

ANG ± 5°

SIZE A4

PJECTION



ORDER INFORMATION

PA-WX30CR-2Xxx-LF

SERIES	LEADFREE
90°SMT	2X02:04 WAY
NON POST	2X40:80 WAY
	REEL
	CAP
	CONTACT 3.0mm

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: