
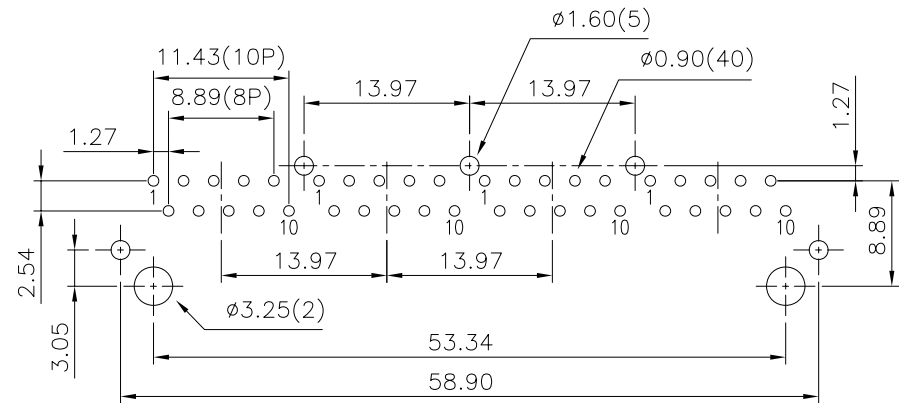


MATERIALS:

- HOUSING—DSM STANYL TE250F6 (NYLON-46)
HEAT DEFLECTION TEMP.290°
RED COLOR, UL94V-0
 - CONTACTS—0.35mm THICK PHOS-BRONZE PLATED
WITH HARD GOLD AND GOLD FLASH IN
SOLDER AREA.
 - SHIELD—0.20mm THICK COPPER ALLOY,
PLATED WITH NICKEL.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

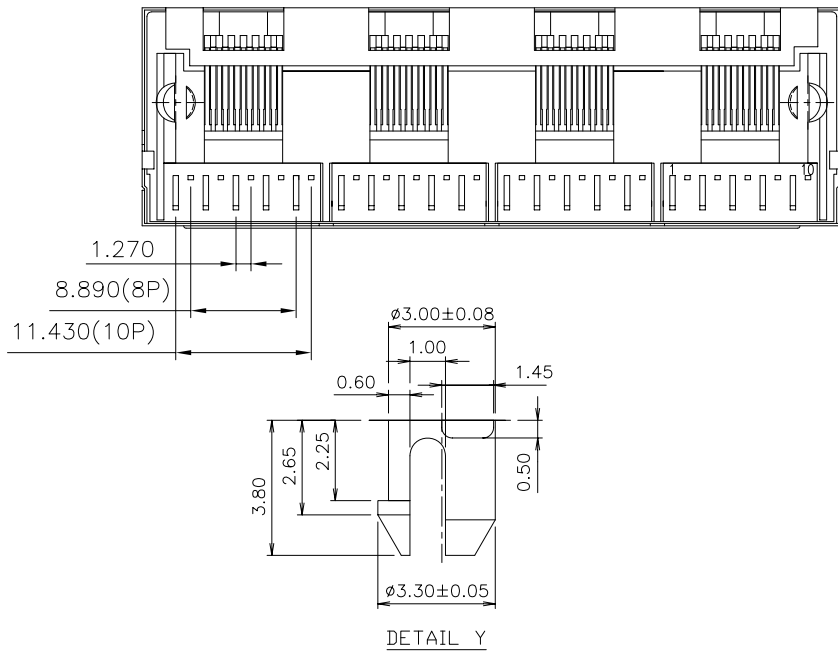

PCB LAYOUT
Ref.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±0.20

UNIT / mm

SCALE 1 : 1

.XX±0.10


DATE

.XXX±

ANG±

SIZE A4

PJECTION



ORDER INFORMATION

MJF12A4-KX06B3-1010-LF

SERIES	LEADFREE
BLACK	10P10C
06u" GOLD	REAR TAB 3.05mm
NON EAR	

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: MODULAR JACK, 1X4, RJ45, FLAT PIN, SIDE ENTRY