
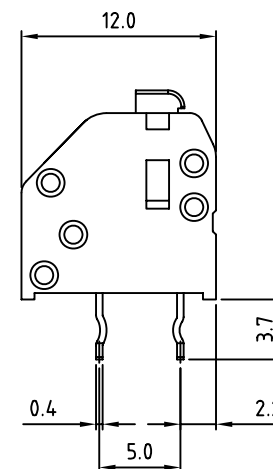



### Material

- Terminal body(Contact pin) : PhBz
- Surface of solder tail : Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

- Electrical cULus
- Voltage rating: 150V
  - Current rating: 2A
  - Wire range:
  - Solid wire(AWG): 20-26
  - Stranded wire(AWG): 20-26
  - Wire strip length: 6-7mm
  - Withstanding Voltage: 1.3KV
  - Operating temperature: -55°C to +105°C
  - Soldering temperature: 245°C±10°C/5 Sec

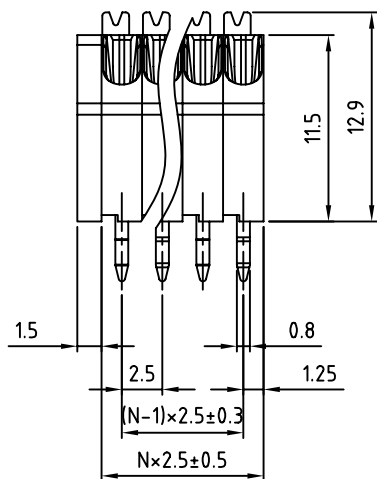

N=Number of Contacts

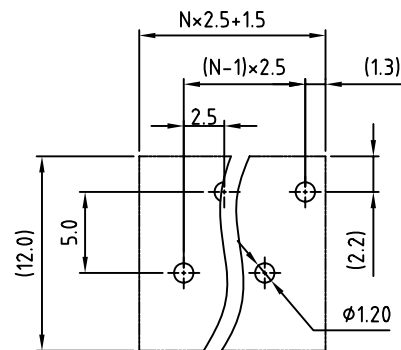

P.C.B Layout

Poles	Tolerance
2P-5P	±0.30
6P-9P	±0.40
10P-13P	±0.50
14P-17P	±0.60
18P-21P	±0.70
22P-24P	±0.80

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



ORDER INFORMATION

TBX025-A12-xxL-LF

SERIES | LEADFREE  
L TYPE FOOT  
02-24WAY  
HIGH 12.0mm  
SLANT DIP

DESCRIPTION: