


Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding Voltage: 600VAC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon 6T (無鹵) or the equivalent material

Recommended P.C.Board Layout
 (Tolerance: ± 0.05)

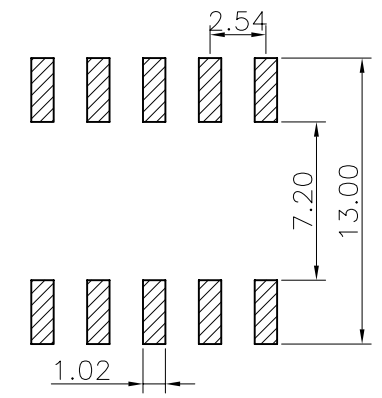

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ± 0.30


.X ± 0.25

.XX ± 0.15


.XXX ± 0.10

ANG ±

P PROJECTION



ORDER INFORMATION



DESCRIPTION: 2.54 FEMALE HEADER DUAL ROWS SMT TYPE CONNECTOR