


SPECIFICATIONS

CURRENT RATING: 3 AMPS
 INSULATOR RESISTANCE: 5000 MEGPHMS MIN.
 CONTACT RESISTANCE: 20 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING: AC 500V
 OPERATING TEMPERATURE: -25 °C ~ +85 °C

MATERIAL

CONTACT: PHOSPHOR BRONZE (GOLD FLUSH)
 INSULATOR: PA-9T, UL 94V-0

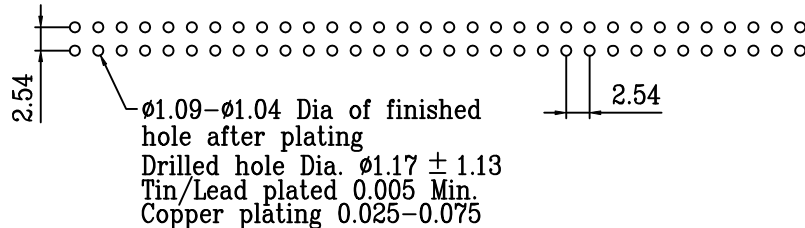

Recommend P.C.B. Layout

TOP View

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PJECTION



ORDER INFORMATION

FE-D114-2Xxx-LF
 SERIES | LEADFREE
 2X02:04WAY
 2X40:80WAY
 HIGH 11.40mm
 DIP 180°

DESCRIPTION: