



RECOMMENDED MOUNTING HOLE

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL. 70 MIN. THICK OVER COPPER STRIKE
3. GOLD PL. 3 MIN OVER NICKEL PL. 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. PHOSPHOR BRONZE PER QQ-B-750
6. BRASS PER QQ-B-613

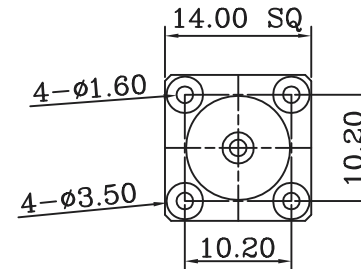

P.C.B LAYOUT

MAX. PANEL THICKNESS=9mm

ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED
8	LEG	NOTE 1	4	NOTE 3
7	INSULATOR	NOTE 4	1	WHITE
6	CUBE BODY	NOTE 1	1	NOTE 2
5	INSULATOR	NOTE 4	1	WHITE
4	CONTACT PIN	NOTE 5	1	NOTE 3
3	BODY	NOTE 1	1	NOTE 2
2	LOCK WASHER	BRASS	1	NOTE 2
1	NUT	NOTE 1	1	NOTE 2

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE


SIZE A4

P PROJECTION

0.5-15 = ±0.15
15-30 = ±0.30
30-120 = ±0.60
>120 = ±1.00
ANGLES
±5°



ORDER INFORMATION

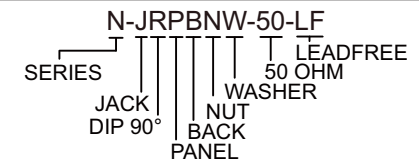

DESCRIPTION: N R/A BULKHEAD PCB JACK (50 OHMS)

煜倫股份有限公司

www.morethanall.com