


PCB Layout

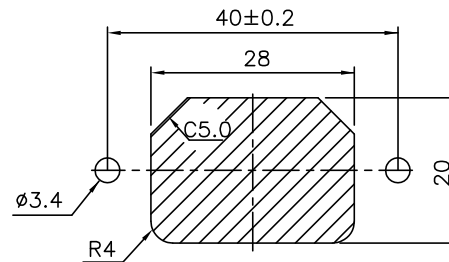

Mounting inlet flange in front of cover.

Rating: 15A 250V AC
 Approvals:UL/CSA
 Rating: 10A 250V AC
 Approvals:VDE/SEMKO/CCC

5	Soldering PIN Brass Strip t=0.8mm Tin-Plated	2
4	Soldering PIN Brass Strip t=0.8mm Tin-Plated	1
3	Contact PIN Brass Strip t=2mm Ni-Plated	1
2	Contact PIN Brass Strip t=2mm Ni-Plated	2
1	Body Insulator PBT	1

PART LIST

Part No.	X±0.25	COLOR
ACF-PRPEF1403-03	3.75	BLACK
ACF-PRPEF1405-03	5.25	BLACK
ACF-PRPEF1410-03	10.25	BLACK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40
 .X ± 0.30
 .XX ± 0.10
 .XXX ±
 ANG ± 1°

PJECTION



ORDER INFORMATION

ACF-PRPEF14xx-03-LF
 SERIES MALE LEADFREE
 DIP 90° 03 WAY
 PANEL 03:3.75mm
 FLANGE 05:5.25mm
 FOOTPRINT 10:10.25mm
 14.1mm

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com