


P.C.B LAYOUT
(TOP VIEW)

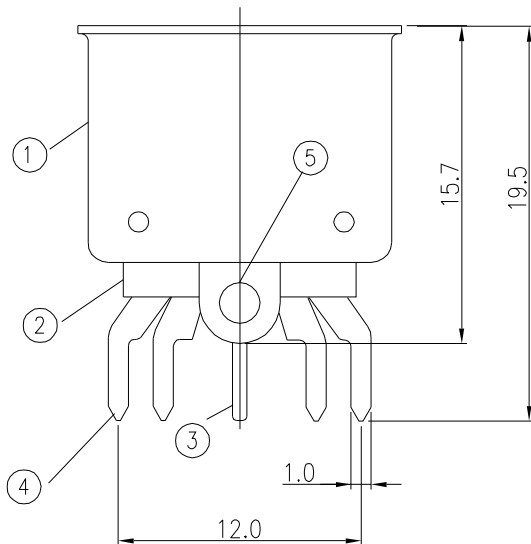

SPECIFICATIONS:

- 1.RATING :100V AC 2A & 20V DC 1A
- 2.CONTACT RESISTANCE:20 MILLOHMS MAX.
- 3.INSERTION RESISTANCE:300M OHM AT 500V D.C
- 4.DIELECTRIC STRENGTH:1,000V A.C./1MINUTE
- 5.INSULATION FOREC: 4.0KG. MAX.
- 6.WITHDRAWAL FOREC: 1.0~3.5KG.

5	RIVET	1	AL	NICKEL PLATED	N/A
4	CONTACT TERMINAL	5	BRASS 0.7T	TIN PLATED	N/A
3	EARTH TERMINAL	1	PBSR-H 0.25T	TIN PLATED	N/A
2	HOUSING	1	P.B.T	BLACK	UL94V-0
1	SOCKET CASE	1	SPCC-SD 0.4T	NICKEL PLATED	N/A
P/N	PART NAME	Q'TY	MATERIAL	PLATING&COLOR	REMARKS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XXX ±

DATE

ANG ±

SIZE A4

P PROJECTION



ORDER INFORMATION

DJ-D12-05-LF
SERIES | LEADFREE
05WAY
PCB LAYOUT BIGGEST WIDTH 12.0mm
DIP180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: