
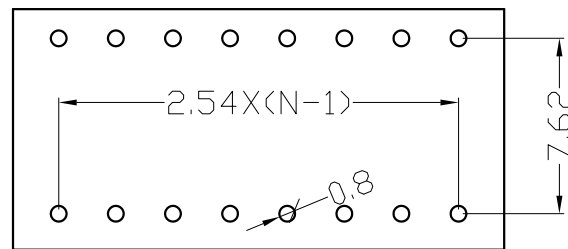


Pitch=2.54mm
N=Number of positions

Housing: PBT, UL94V-0
Contact: Phosphor bronze, Gold plated

Electrical
Rated voltage: 24V/DC
Contact Resistance: $\leq 100m\Omega$
Rated current: 25mA
Insulation Resistance: $\geq 100M\Omega$ /DC500V
Withstanding voltage: 500VAC/1min
Mechanical & operating ambient
Operation Temp: -20°C — +85°C
Soldering temperature: +260°C, 10s max
Mechanical life: 2000 operations Min
Operation force: 400gf max.

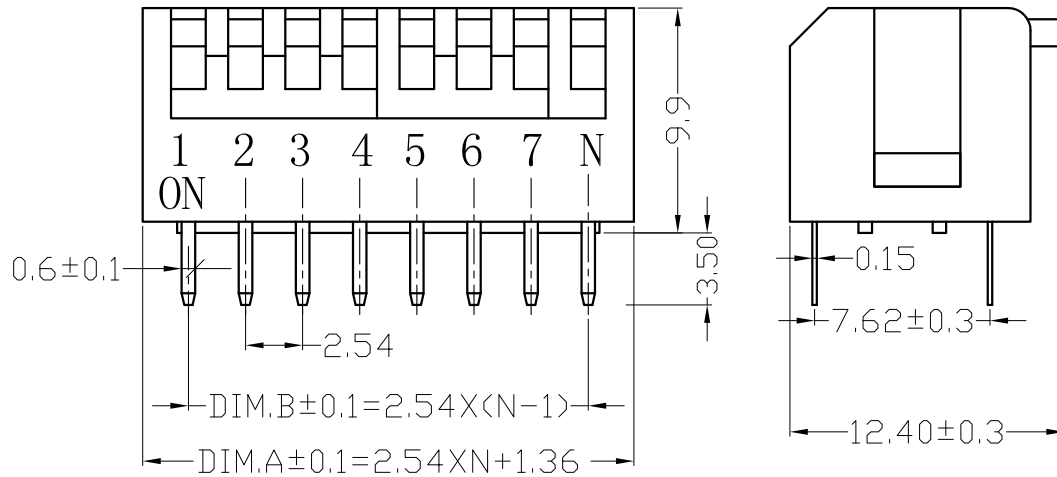

P. C. B. LAYOUT

PROD. NO.	DIM"A"	DIM"B"
SW-PBL-02	6.44	2.54
SW-PBL-03	8.98	5.08
SW-PBL-04	11.52	7.62
SW-PBL-05	14.06	10.16
SW-PBL-06	16.60	12.70
SW-PBL-07	19.14	15.24
SW-PBL-08	21.68	17.78
SW-PBL-09	24.22	20.32
SW-PBL-10	26.76	22.86
SW-PBL-11	29.30	25.40
SW-PBL-12	31.84	27.94

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.10


DATE

.XXX ±

ANG ± 1°

SIZE A4

P PROJECTION



ORDER INFORMATION

SW-PBL-xx-LF
SERIES | LEADFREE
| 02-12 WAY
| BLUE
PIANO

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: Dip Switch Piano type