

SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 350V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 6T,UL94V-0
 Color: Natural(Beige)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
ZHQ-W-02	1.50	4.30
ZHQ-W-03	3.00	5.80
ZHQ-W-04	4.50	7.30
ZHQ-W-05	6.00	8.80
ZHQ-W-06	7.50	10.30
ZHQ-W-07	9.00	11.80
ZHQ-W-08	10.50	13.30
ZHQ-W-09	12.00	14.80
ZHQ-W-10	13.50	16.30
ZHQ-W-11	15.00	17.80
ZHQ-W-12	16.50	19.30
ZHQ-W-13	18.00	20.80
ZHQ-W-14	19.50	22.30
ZHQ-W-15	21.00	23.80

RoHS Compliant

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm
 DATE


SCALE 1:1

SIZE A4


PJECTION

TOLERANCES ARE

X. ±
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.05
 ANG ±



ORDER INFORMATION

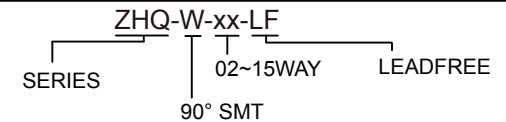

DESCRIPTION: 1.50mm PITCH 90° WAFER-SMT TYPE