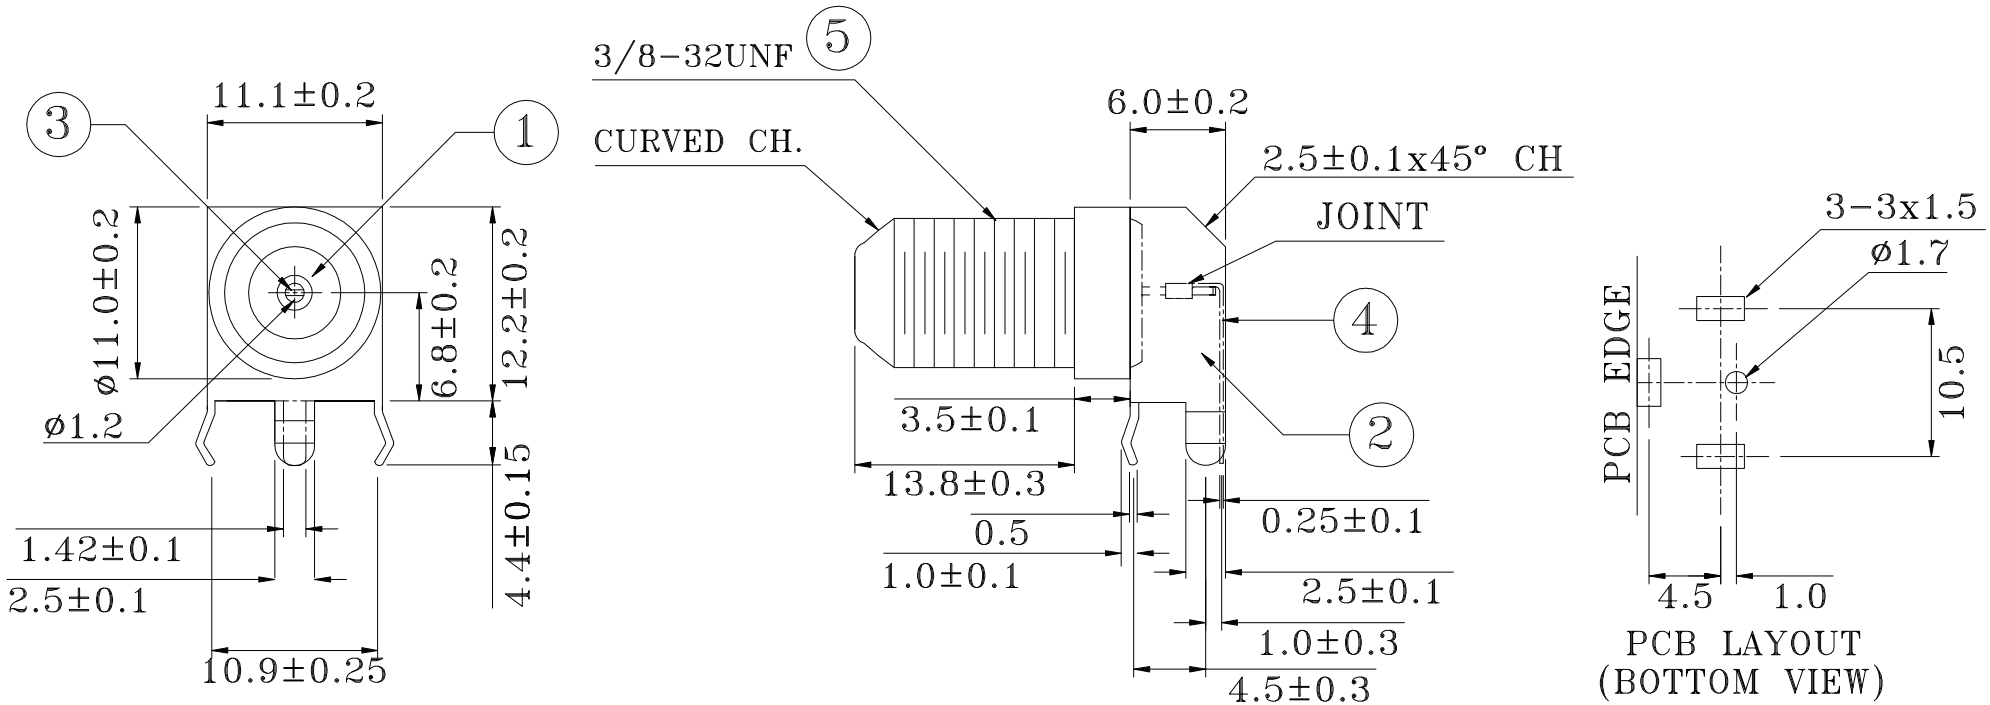

NO.	NAME	MATERIAL	FINISH	Q'TY
1	INSULATOR	P.P	NATURAL	1
2	BRACKET	C.R.S 0.41mm	TIN PLATED	1
3	CENTER PIN	PHOS. BRONZE	TIN PLATED	1
4	TERMINAL	BRASS	TIN PLATED	1
5	BODY	BRASS	NICKEL PLATED	1

ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING:AC 1500V
WITH STANDING VOLTAGE:AC 500V ONE MINUTE
INSULATION RESISTANCE:500MΩ MIN AT DC 500V
CONTACT RESISTANCE:MAX 5mΩ AT DC 1A
IMPEDANCE:75Ω NOMINAL
VSWR:1.2MAX. 0-1,500 MHZ

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ±
		.XX ±
DATE		.XXX ±
		ANG ±
SIZE A4	PPOJECTION	



ORDER INFORMATION

F-JR-75-LF
SERIES
LEADFREE
75 OHM
DIP 90°
JACK

DESCRIPTION: