





- 一.
- 1) 將成品一一放入REEL包裝盤內, 依同一方向放入 .
 - 2) 包裝時, 如下圖所示 .

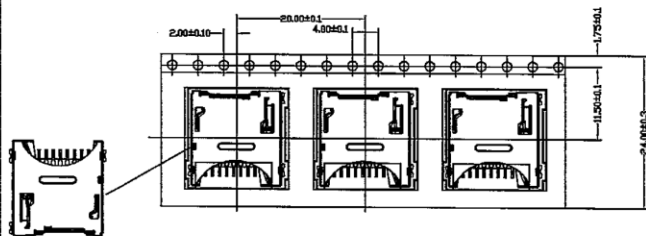


- 二.
- 1) 裝盤前先把前面空25pcs產品, 然後再開始裝盤, 尾端也需空出5pcs產品.
 - 2) 裝滿成品的REEL包裝盤如下圖所示.
 - 3) 一個REEL包裝盤放置 1500 個成品 .

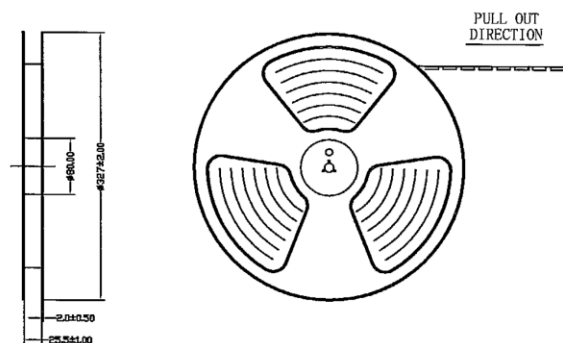

- 三.
- 1) 每箱裝 10 盤REEL包裝盤 .
 - 2) 每箱放置 15000 PCS 的成品 .

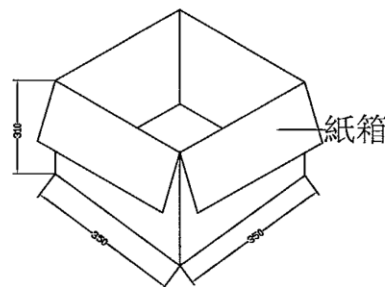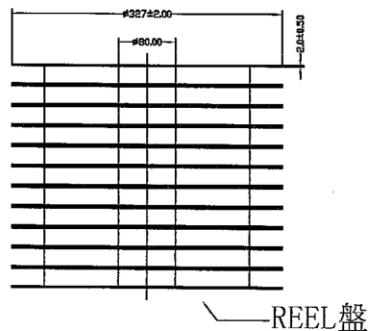

- 四.
- 1) 用TAPE將紙箱封實 .

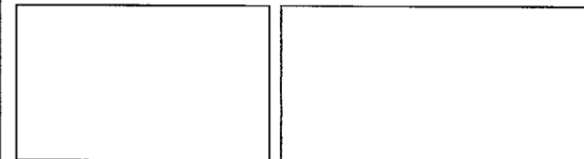


備註 (REMARK)

1. 若有未裝滿之零數箱, 必須以緩衝材塞滿 .


NOTE:

1. RE DETAILED DIMENSION. SEE SALES DRAWING.

3. LEAD TAPE LENGTH

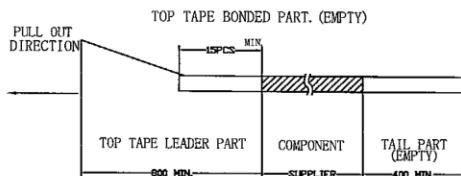

4. PEELING OFF FORCE OF TOP TAPE: 0.1N-1.3N (10.2gf-130gf)
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT.
PEEL OFF SHOULD NOT BE ALLOWED, DURING TRANSPORTATION.



5. MATERIAL
CARRIER TAPE: PP, PS
TOP TAPE: PET, PE, PEF
REEL: PS POLYSTYRENE (PS) (RECYCLE MATERIAL CONTAINED)
所有材料需防靜電

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1:1

.XX ± 0.15


DATE

.XXX ±

ANG ±

SIZE A4

P PROJECTION



ORDER INFORMATION

TFC-WPCE14BR-08-LF
SERIES | | | | | LEADFREE
| | | | | 08 WAY
90°SMT REEL
PUSH PUSH SWITCH OPEN
C/LAYOUT EAR TO EAR 14.46mm

DESCRIPTION: MICRO SD (T-FLASH), SMT, H=1.45mm METAL SHIELD, FEMALE, PUSH-PUSH TYPE

www.morethanall.com