


Pin针用珍珠棉保护

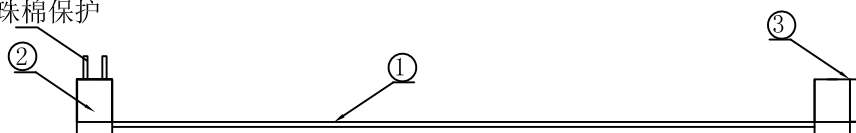

注:

1. K=K出口紙箱包裝, 每一層用隔板隔開.
2. 電氣特性符合以下要求:
耐電壓:300V, 導通阻抗:3歐, 絕緣阻抗:10M歐

3	HAF-C2-10	BK G/F 1PCS
2	HAP-C2-10	BK G/F 1 PCS
1	UL2678 30AWG PH=0.635mm 10C	L= mm 1PCS

P1	1	2	3	4	5	6	7	8	9	10
P2	1	2	3	4	5	6	7	8	9	10

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ± 0.20


.X ± 0.15

.XX ± 0.10

.XXX ±

ANG ± 2°

PPOJECTION



ORDER INFORMATION

HAFHAP-1010-AxxC-LF

SERIES

LEADFREE

8C:80mm

13C:130mm

FEMALE TO MALE

10 TO 10 WAY

DESCRIPTION: