



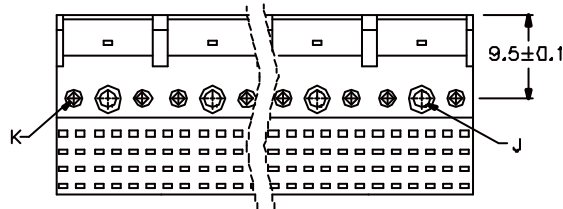




Detail K
(Scale 5 : 1)

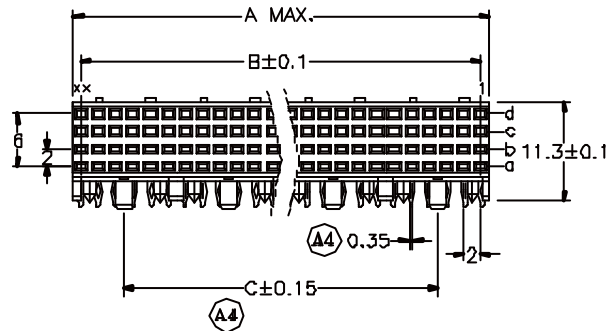

Detail J
(Scale 5 : 1)

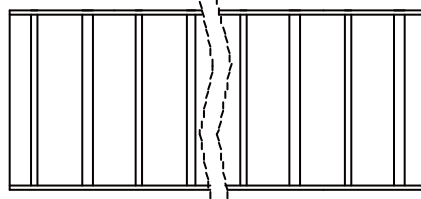

Position	Dimension		
	A	B	C
24	11.95	10	0
48	23.95	22	12
72	35.95	34	24
96	47.95	46	36
120	59.95	58	48
144	71.95	70	60
168	83.95	82	72
192	95.95	94	84
X Length	02 2.90	03 3.53	

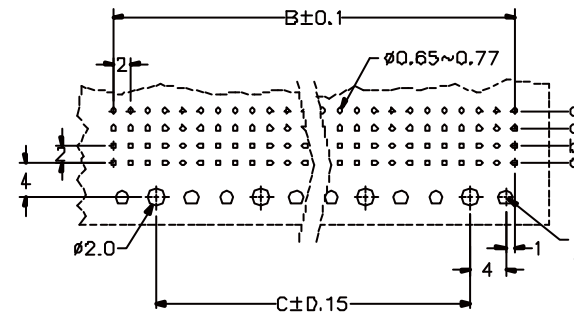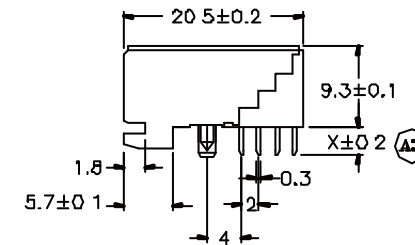

REMARK:
Ø1.5 FOR TONGING
Ø1.6 FOR HANDING

P.C Board Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE

SIZE A4

PJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

FUB-SRxx-4Xxx-LF
SERIES | LEADFREE
4X06:24WAY
4X48:192WAY
FEMALE | 02:2.90
03:3.53
DIP 90°

DESCRIPTION: H.D.Female 2.0mm dip 4 Rows