

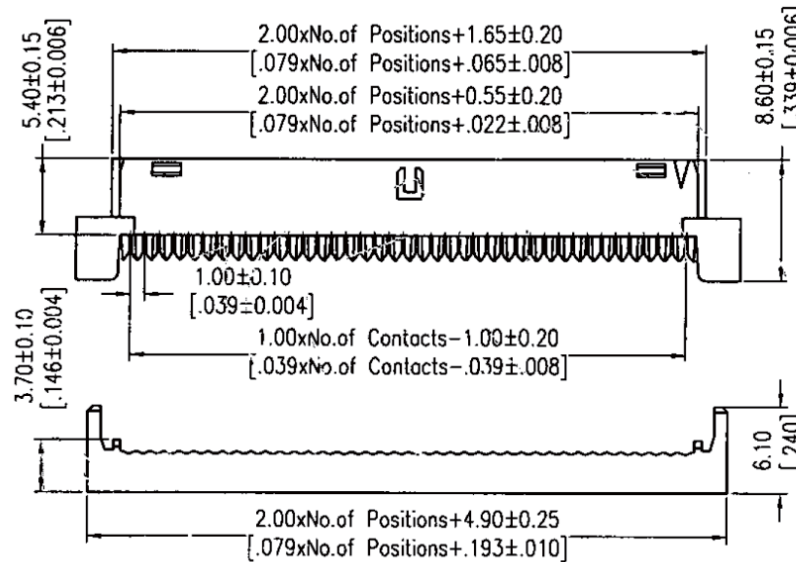



**NOTES:**

Rated Current:1.0AMP  
 Contact Resistance:30mΩ max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ min  
 Operation Temperature:-40℃ to +105℃



Contact Material:Phosphor Bronze  
 Contact Plating:Au Over Ni  
 Insulator Material:PBT+30%G.F UL94V-0

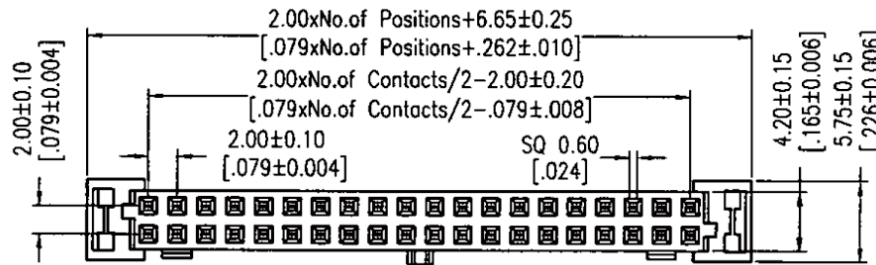

SINGLE RAMP LOCKING ONLY  
 (APPLICABLE FOR 10 TO 12 CKT)



POLARIZATION AND RAMP LOCKING  
 (APPLICABLE FOR 14 TO 50 CKT)

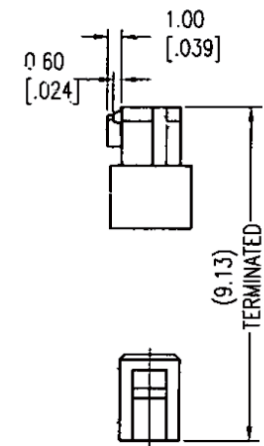

CONTACT VIEW

only production 10.12.14.16.20.22.26.30.34.40.44.50PIN

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±  
 .X ± 0.40  
 .XX ± 0.25  
 .XXX ± 0.15  
 ANG ±

PJECTION



**ORDER INFORMATION**

MPVK-C2-2Xxx-LF

SERIES	LEADFREE
	2X05:10WAY
	2X25:50WAY
TWO TYPE	

DESCRIPTION: