



SECTION A-A

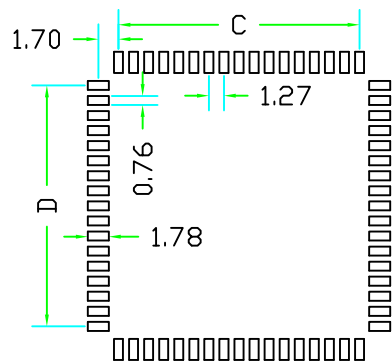

P.C.B LAYOUT

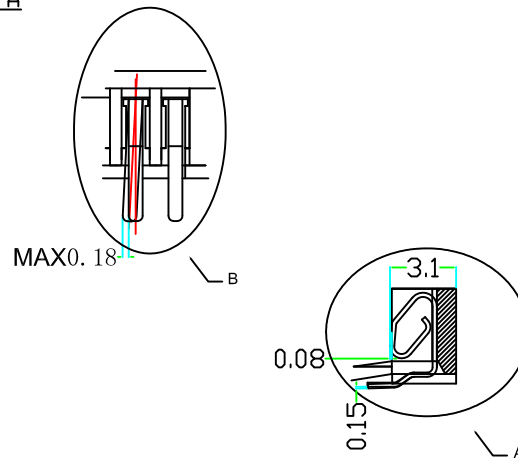

MATERIAL:

INSULATOR :Hi-temp PPS.UL 94V-0

Contact material:phosphor bronze

Contact Platred : 90 μ "tin. 30 μ "nickel (Min)

SPECIFICATIONS:

Temperature range:-50 $^{\circ}$ C to 105 $^{\circ}$ C

CURRENT Rating :1 AMP

Durability:5 cycles (Min)

Contact resistance:30 Milliohms (Max)

Insulation Resistance :1000 Megohms (Min)

Withstanding Voltage: AC 600 V/min

NO OF CONTACT	A \pm 0.2	B \pm 0.2	C \pm 0.1	D \pm 0.1	E \pm 0.2
20	15.66	15.66	5.08	5.08	17.28
28	18.20	18.20	7.62	7.62	20.87
32	18.20	20.74	7.62	10.16	22.60
44	23.28	23.28	12.70	12.70	28.30
52	25.82	25.82	15.24	15.24	31.65
68	30.90	30.90	20.32	20.32	38.83
84	35.98	35.98	25.40	25.40	46.00

UNIT/mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm


SCALE 1:1

DATE

SIZE A4

X, \pm
.X \pm 0.25
.XX \pm 0.15
.XXX \pm
ANG \pm 2 $^{\circ}$

P PROJECTION



ORDER INFORMATION

PL-VA-xx-LF
SERIES | LEADFREE
20-84WAY
A TYPE
180 $^{\circ}$ SMT

DESCRIPTION: SURFACE SMT PLCC SOCKET **PIN

煜倫股份有限公司

www.morethanall.com