
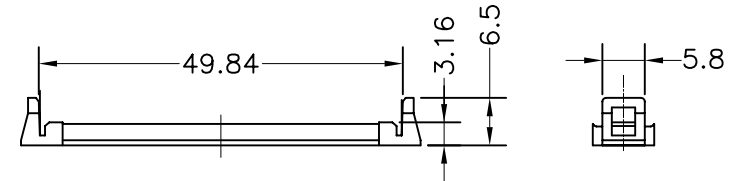

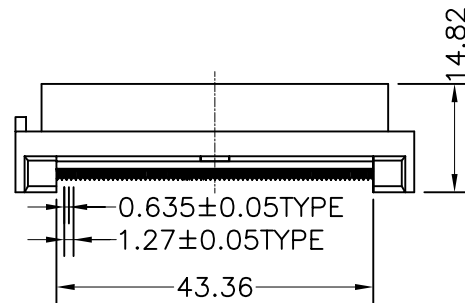
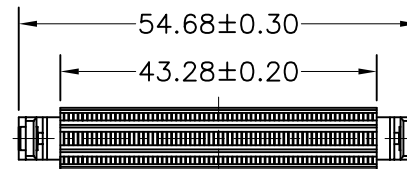


MATERIAL:

- 1.HOUSING: PBT+30 %G.F.(UL 94V-0)
- 2.TERMINAL:Phosphor Bronze,C5191R-H T=0.300.01mm
- 3.TETMINAL PLATED:GOLD FLASH ON CONTACT ;
100u" MIN NICKEL OVERALL.

SPECIFICATION:

- 1.CURRENT RATING:0.5 AMP. MAX.
- 2.DIELECTRIC WITHSTANDING VOLTAGE:500V AC
R.M.S. FOR ONE MINUTE.
- 3.INSULATION RESISTANCE:1000M OHMS MIN.
- 4.CONTACT RESISTANCE :30m OHMS MAX.
- 5.OPERATING TEMPERATURE :-20°C TO +85 °C.

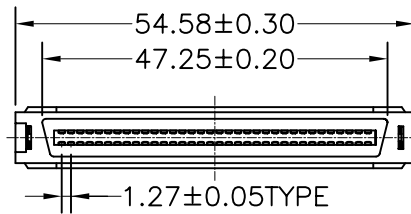

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

HPCP-SF2-068-LF

SERIES | | LEADFREE
| | 68 WAY
| | TWO TYPE
| | IDC
| | FEMALE

DESCRIPTION: SCA (F)68P 刺破式(ASS'Y) CUSTOMER