

Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 1000M Ohm Min. At 500VDC.


Rated Voltage And Current: 1.5A At 250VAC Minimum.

Dielectric Withstanding Voltage: 500V AC (rms) for 1 Minute (Rev. 2.0)

Durability (Life Test): 1500 Cycles

Insertion Force: 35 Newton Maximum.

Extraction Force: 10 Newton Minimum.

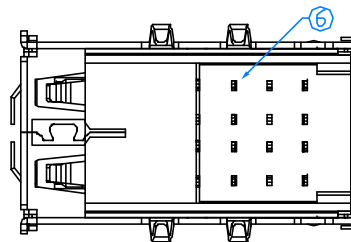

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	PBT G.F.	BLACK	1	
2	PIN TERM.	PHOS. BRONZET:0.25	GOLD-TIN PLATED	16	Gold:30u'; Ni:40~60u'; TIN:120u' (100% pure Tin of lead free plating)
3	SHELL	BRASS,T:0.4	TIN PLATED	1	TIN:120~200u'
4	SPRING CLIP	BRASS,T:0.3	TIN PLATED	3	TIN:120~200u'
5	REAR SHELL	SPCC,T:0.3	NICKEL PLATED	1	NI:80~120u'
6	BOTTOM COVER	PBT G.F.	BLACK	1	

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.38


.X ± 0.25

.XX ± 0.13

.XXX ± 0.05

ANG ± 1°

P PROJECTION



ORDER INFORMATION

USB D1-FRSBK-4A-LF

SERIES | | | | LEADFREE
4 PIN A TYPE
BLACK
SPRING
DIP 90°
FEMALE

DESCRIPTION: QUADRUPLE USB A TYPE