
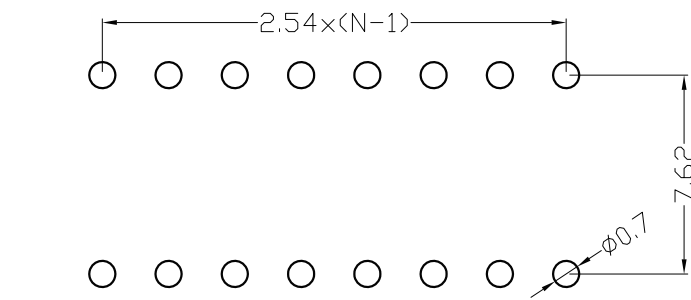
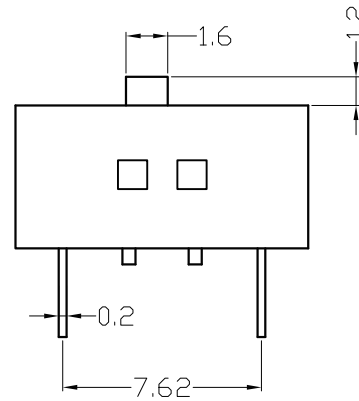


Pitch=2.54mm
N=Number of positions

Housing: PBT, UL94V-0
Contact: Phosphor bronze, Gold plated

Electrical
 Rated voltage: 24V/DC
 Contact Resistance: $\leq 100m\Omega$
 Rated current: 25mA
 Insulation Resistance: $\geq 100M\Omega / DC500V$
 Withstanding voltage: 500VAC/1min
 Mechanical & operating ambient
 Operation Temp: $-20^{\circ}C - +85^{\circ}C$
 Mechanical life: 2000 operations Min
 Operation force: 400gf max.

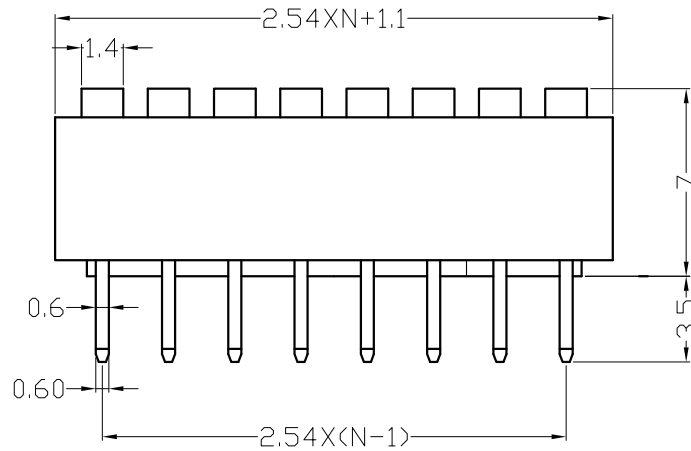

P. C. B LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm


SCALE 1:1

DATE

SIZE A4

P PROJECTION

X, ± 0.25
 .X, ± 0.10
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

SW-SBL-xx-LF
 SERIES | LEADFREE
 | 02~12WAY
 | BLUE
 | SLIDE TYPE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: