

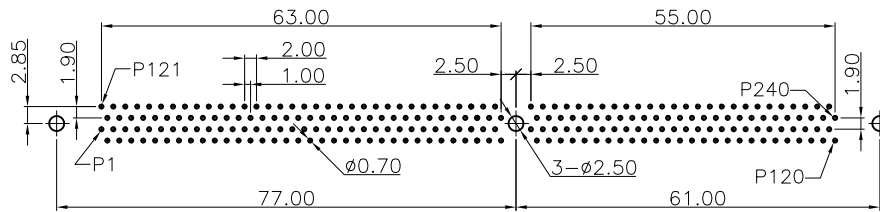
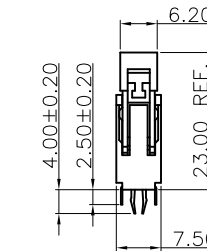


SECTION:A-A
SCALE:2/1

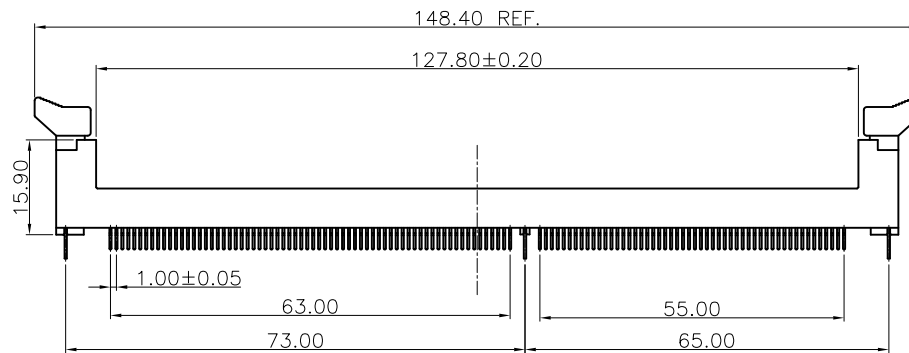

RECOMMENDED PCB LAYOUT

NOTE:
MATERIAL:
HOUSING:THERMOPLASTIC;(NY66+30%G/F)
CONTACT:BRASS
PLATING:
CONTACT: GOLD PLATING
SPECIFICATION:
VOLTAGE RATING: 30V
CURRENT RATING: 0.5A
CONTACT RESISTANCE TERMINAL:40mΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE:500V AC
INSULATION RESISTANCE:1000MΩ MIN



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE

SIZE A4

X. ±
.X ± 0.30
.XX ± 0.15
.XXX ± 0.10
ANG ±

PJECTION



ORDER INFORMATION

DIM1-DZ-240V18-LF
SERIES | LEADFREE
1.8V
240 WAY
CLIP
DIP 180°

DESCRIPTION: DIMM 1.0 240P 180° 成品