


Specifications
 Current Rating:1.0Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:300VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

Recommended P.C.Board
 Layout
 (Tolerance:±0.05)

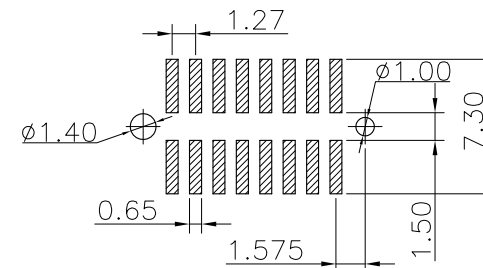

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

X ± 0.30

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15


DATE

.XXX ± 0.10

ANG ±

SIZE A4

PJECTION



ORDER INFORMATION

PAB-V140PC-2Xxx-LF
 SERIES | LEADFREE
 2X05:10 WAY
 2X40:080 WAY
 180°SMT | CAP POST
 14.0mm HIGH

煜倫股份有限公司

www.morethanall.com

DESCRIPTION:1.27 BOX HEADER DUAL ROWS SMT TYPE CONNECTOR