


## MATERIALS


- \* Body : Liquid Crystal Polstal (L.C.P.) UL (94V-0)
- \* Contact : Copper alloy
- \* Contact plated : gold over nicket (40-60u")or tin plating
- \* Latch : Nylon 66 UL (94 V-0)

## SPECIFICATION

- \* Contact curret rating : 1 AMP
- \* Conact resistance : 30 Milli OHMS Max.
- \* Insulation resistance : 10,000 megoohms Min. initial
- \* Operating temperature : -55°C to +105°C
- \* Dielectric Withstanding Voltage : 1.0KVAC
- \* Capacitance : 1pf Max.
- \* Durability : 25 cycle Min.
- \* Conact engaging force : 110 g Max. per conact,initial
- \* Contact separating force : 40 g Min. per contact,initial

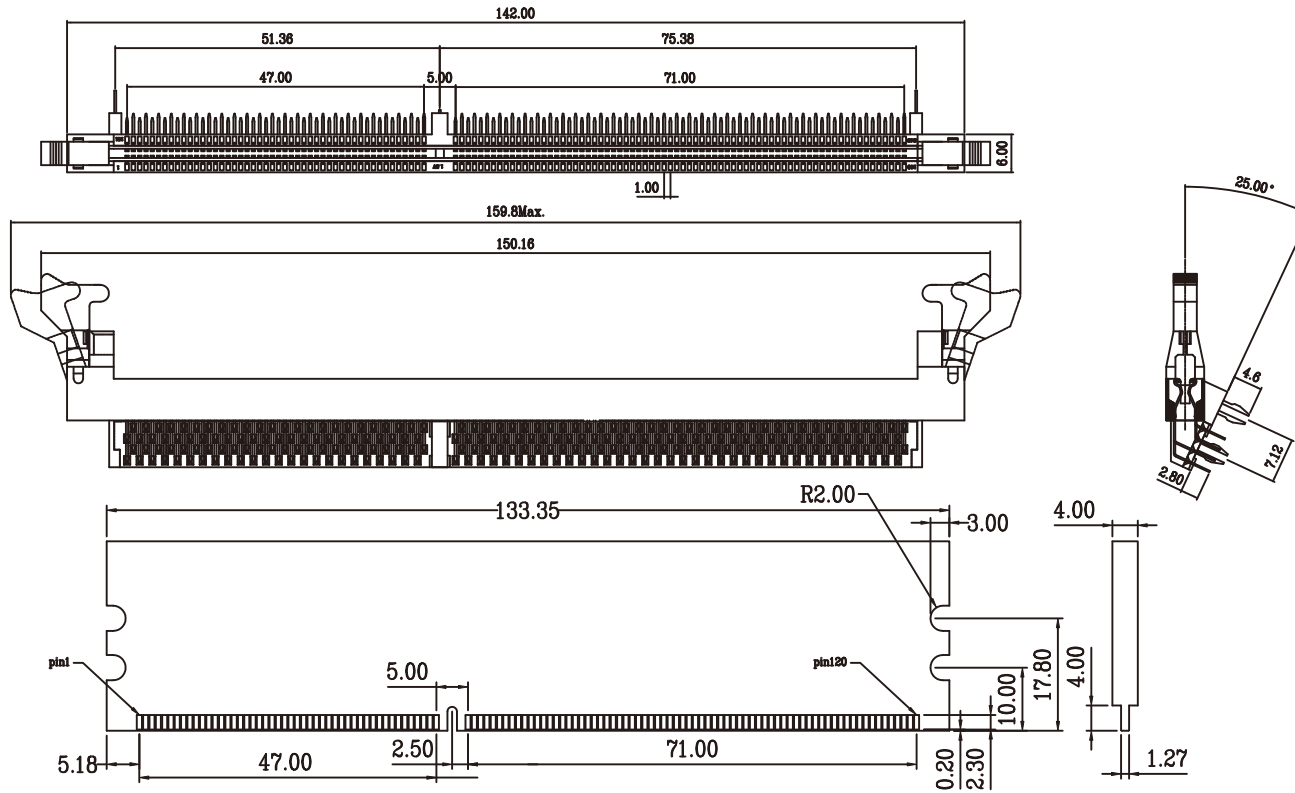

Recommended Module Layout

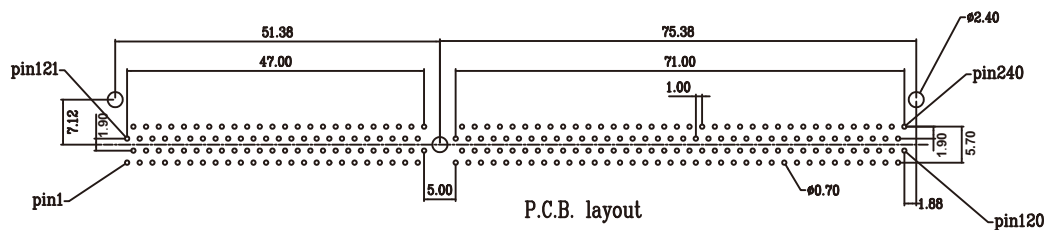

P.C.B. layout

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50


.X ± 0.35

.XX ± 0.25

.XXX ± 0.05

ANG ±

PJECTION



**ORDER INFORMATION**

DIM1-AZ-240V15R-LF  
SERIES | LEADFREE  
SLANT DIP | 1.5V  
CLIP | 240 WAY  
REVERSED

DESCRIPTION: DDR3-240P 1.0mm pitch 25degree Reverse type

煜倫股份有限公司

www.morethanall.com