
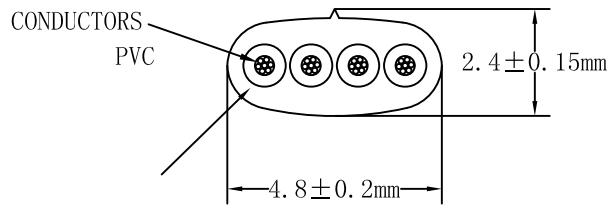


P1
6P4C F 3U" PLUG

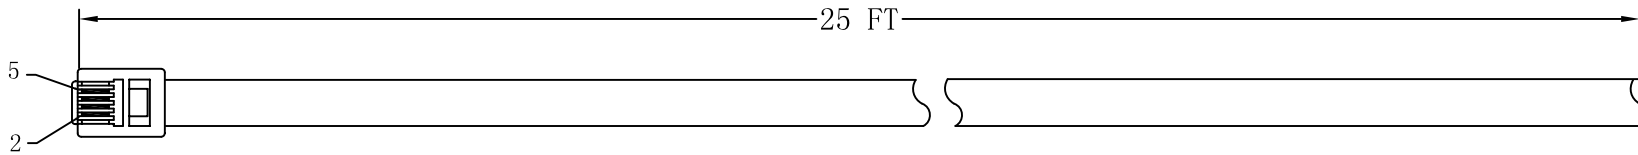

WIRING DIAGRAM:

P1	COLOR	P2
1	N.C	1
2	black	2
3	red	3
4	green	4
5	yellow	5
6	N.C	6

SPECIFICATION:

CABLE: 1. COMPONENT:


- A. Size of conductors : 4C NO UL 28AWG (7/0.127) "RoHS" WIRE.
- B. Color coded insulation : (P.P) Black, Red, Green, yellow.
- C. Diameter of electric : 0.95 ± 0.05 mm.

2. JACKET MATERIAL : PVC

- A. Overall diameter : Ave 4.8*2.4mm
- B. Color : BLACK

- PLUG: 1. TYPE : Modular U.S 6p4c , golden flash 3u".
2. MATERIAL : PC UL 94v-2

PACKING:

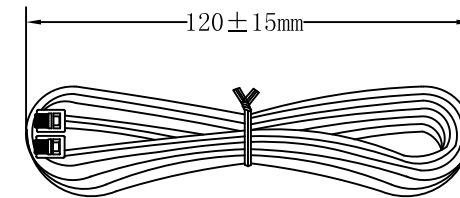

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

RJX1-640028BK-M25F-LF

SERIES

6P4C

28 AWG

BLACK

MALE

25 FT

LEADFREE

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com