


Material:
 Insulator: PBT+30% Glass Fiber (UL94V-0).
 Contact: Phosphor Bronze.
 Contact Plated: Gold or Tin over Nickel Plated.
Specification:
 Current Rating: 1 Amp.
 Withstanding Voltage: AC 500V for 1 Minute.
 Insulation Resistance: 1000MΩ Min. at DC 500V.
 Contact Resistance: 15mΩ Max..
 Operating Temperature: -40°C ~ +105°C.

Pos.	Dim. A	Dim. B	Dim. C	Pos.	Dim. A	Dim. B	Dim. C
6	11.20	4.00	5.00	38	43.20	36.00	37.00
8	13.20	6.00	7.00	40	45.20	38.00	39.00
10	15.20	8.00	9.00	42	47.20	40.00	41.00
12	17.20	10.00	11.00	44	49.20	42.00	43.00
14	19.20	12.00	13.00	46	51.20	44.00	45.00
16	21.20	14.00	15.00	48	53.20	46.00	47.00
18	23.20	16.00	17.00	50	55.20	48.00	49.00
20	25.20	18.00	19.00	52	57.20	50.00	51.00
22	27.20	20.00	21.00	54	59.20	52.00	53.00
24	29.20	22.00	23.00	56	61.20	54.00	55.00
26	31.20	24.00	25.00	58	63.20	56.00	57.00
28	33.20	26.00	27.00	60	65.20	58.00	59.00
30	35.20	28.00	29.00	62	67.20	60.00	61.00
32	37.20	30.00	31.00	64	69.20	62.00	63.00
34	39.20	32.00	33.00	66	71.20	64.00	65.00
36	41.20	34.00	35.00	68	73.20	66.00	67.00

Recommended P.C. Board
 Hole Layout

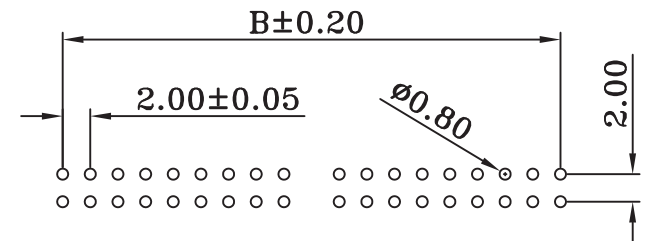

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30
 X ± 0.20
 .XX ± 0.10
 .XXX ± 0.05
 ANG ±

PPOJECTION



ORDER INFORMATION

MIP-C2-xxx-LF
 SERIES | LEADFREE
 006-068WAY
 TWO TYPE

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com