
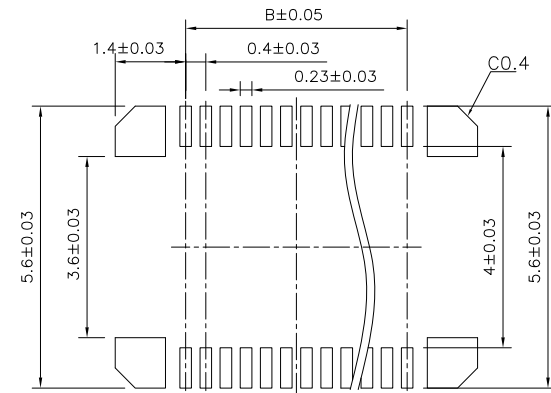
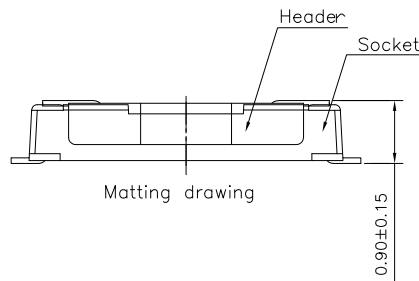


Specifications:

1. Current Rating : 0.3A AC/DC
2. Voltage Rating : 30V AC/DC
3. Contact Resistance : 80m ohm. max.
4. Insulation Resistance : 1000M ohm. min.at 250V DC
5. Withstanding Voltage :150V AC for one minute
6. Operating Temperature Range : -55°C to +85°C

Material and Plated

- 1.Housing : High Temp Plastic. (UL94V-0)
- 2.Contact : Copper Alloy
- 3.Plated : Gold Plated



PCB Layout

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
10	4.70	1.60	40	10.70	7.60
20	6.70	3.60	50	12.70	9.60
24	7.50	4.40	60	14.70	11.60
30	8.70	5.60	70	16.70	13.60

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ± 0.20

UNIT / mm

SCALE 1 : 1

.XX ± 0.15


DATE

.XXX ±

ANG ±

SIZE A4

PJECTION



ORDER INFORMATION

NP0433-S08X-xxx-LF

SERIES

LEADFREE

010~070WAY

NON POST

UNMATED HIGH 0.8mm

FEMALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 0.4mm Board To Board Socket Matting Height 0.90mm