


CONTACT RESISTANCE: 20m OHMS MAX. AT
DC 100mA
INSULATOR RESISTANCE: 1000M OHMS MIN.
AT DC 500V
CURRENT RATING: 1 AMP

DIELECTRIC WITHSTANDING
VOLTAGE: AC 500V FOR 1 MINUTE
OPERATING TEMPERATURE: -55°C - +105°C
CONTACT: PHOSPHOR BRANZE
HOUSING: L.C.P. (Black Color)

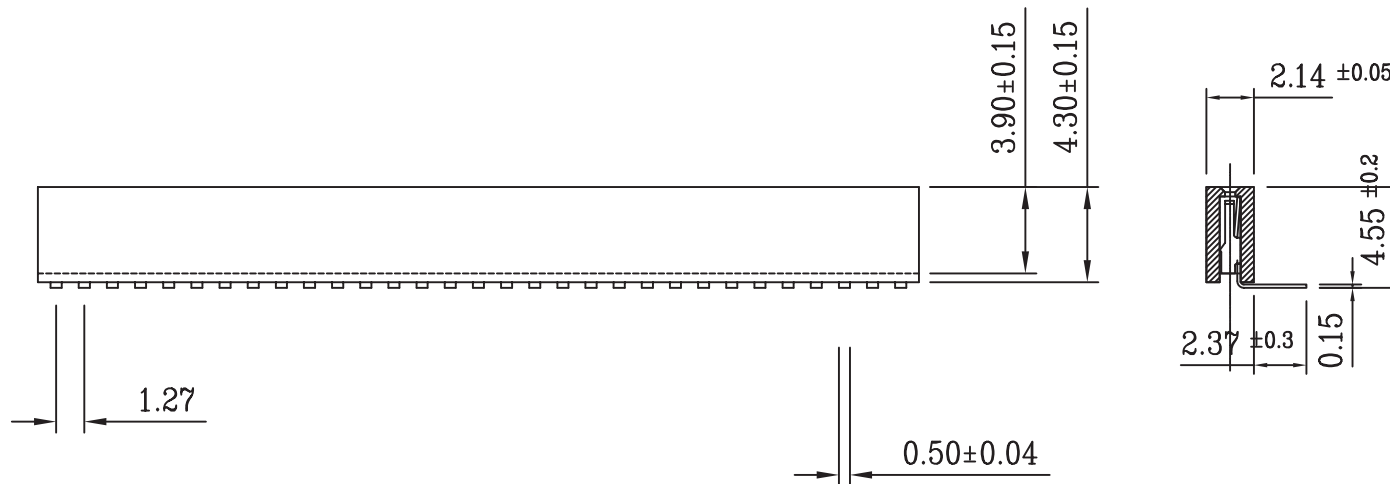

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.15
.XX ± 0.10
.XXX ±
ANG ±

P PROJECTION



ORDER INFORMATION

YA-R43-1Xxx-LF

SERIES

1X02:02WAY LEADFREE

1X50:50WAY

HIGH 4.3mm

DIP 90°

DESCRIPTION: 1.27mm Dip Socket (Straight/Base:4.3mm)