


NOTES:

1. ALL DIMENSIONS ARE "mm".
2. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.

WIRING CHART

A	COLOR	B
1	RED	1
2	BLACK	2
3	BROWN	3
4	ORANGE	4
5	GREEN	5

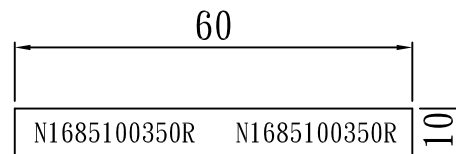

ELECTRICAL TESTING:

1. 100% OPEN/SHORT TEST
2. CONTACT RESISTANCE: 5mΩ
3. INSULATION RESISTANCE: 5MΩ Min

NO.	ITEM.	DESCRIPTION	Q'TY	UL/CSA No.
1	WIRE:	UL1571 #28 OD:0.8 Red	1PCS	E108485
2	WIRE:	UL1571 #28 OD:0.8 Black	1PCS	E108485
3	WIRE:	UL1571 #28 OD:0.8 Brown	1PCS	E108485
4	WIRE:	UL1571 #28 OD:0.8 Orange	1PCS	E108485
5	WIRE:	UL1571 #28 OD:0.8 Green	1PCS	E108485
6	HOUSING:	PNM-H-05	2PCS	E338796
7	TERMINAL:	PNM-T28	10PCS	E338796
8	H. S TUBE:	3.5φ*150mm Black F32	1PCS	E203950
9	WATERPROOF LABEL:	AS DRAWING	1PCS	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PJECTION



ORDER INFORMATION

PNMX2-050528HT1-F20C-LF

SERIES

LEADFREE
200mm
FEMALE TO FEMALE
HEAT SHRINK TUBING
28 AWG
05 TO 05 WAY

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: CABLE ASS'Y