


Pin No.	Dim.G
≤25pin	0.12
>25pin	0.15

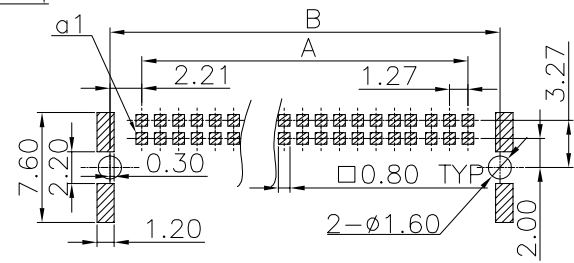

Recommended P.C.Board Layout
 (Tolerance:±0.05)

Specifications
 Current Rating: 1.7Amp/Pin
 Insulation Resistance: 10000MΩMin.
 Dielectric Withstanding Voltage: 500VAC
 Contact Resistance: 25mΩMax.
 Operating Temperature: -55°C to +125°C
 Materials
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
 Colour: Black


PIN NO.	A	B	C	D	E	F
10	5.08	9.50	11.50	8.30	7.30	9.10
12	6.35	10.77	12.77	9.57	8.57	10.37
16	8.89	13.31	15.31	12.11	11.11	12.91
20	11.43	15.85	17.85	14.65	13.65	15.45
26	15.24	19.66	21.66	18.46	17.46	19.26
32	19.05	23.47	25.47	22.27	21.27	23.07
40	24.13	28.55	30.55	27.35	26.35	28.15
50	30.48	34.90	36.90	33.70	32.70	34.50
60	36.83	41.25	43.25	40.05	39.05	40.85
68	41.91	46.33	48.33	45.13	44.13	45.93
80	49.53	53.95	55.95	52.75	51.75	53.55

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司
 www.morethanall.com

DRAWING BY	CY	X. ± 0.30
CHECKED BY	GENIUS	.X ± 0.25
UNIT / mm	SCALE 1:1	.XX ± 0.15
DATE		.XXX ± 0.10
SIZE A4	P PROJECTION	ANG ±



ORDER INFORMATION

HAUB-PW32P-xxx-LF
 SERIES | | | LEADFREE
 | | | 010-080WAY
 MALE | UNMATED HIGH 3.20mm
 90°SMT

DESCRIPTION: Pitch1.27 male Connector SMC B Type 90° SMT Type