

MATERIAL:

- A. INSULATOR:PC(94V-2)&GLASS-FIBER
- B. CONTACT:BRONZE
- C. CONTACT PLATED:TIN PLATED

SPECIFICATION:

- A. CURRENT RATE:3A/250V AC
- CONTACT RESISTANCE:
- A. (BRONZE)11.5m AT 2VΩ DC 100mA
- B. (PHOSPHOR BRONZE)10.9m AT 2VΩ DC 100mA
- C. INSULATOR RESISTANCE:1.5G ATW 500V DC 1Min
- D. Dielectric withstanding:1000Vac 1Min

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE


SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

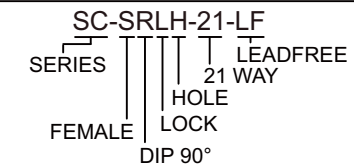

DESCRIPTION: Double Scart Socket with Center Screw Mounting Holes(OD=2.4)