


R1 : 1.50---H=4.85mm
 R2 : 2.80---H=6.15mm
 R3 : 2.10---H=5.45mm

SPECIFICATIONS

- * Current Rating : 1 Amps
- * Insulator resistance: 5000 Megohms min.
- * Contacts resistance :20 m ohms max.
- * Dielectric withstanding: AC 500 V
- * Operating Temperature: -40°--+105°C
- * Max Processing Temp: 230° for 30 seconds
(260° for 7 seconds)
- * Contact Material: Phosphor bronze
- * Housing: NL-9T (UL 94 V-0)

S-R73xx-2Xxx-LF
 LEADFREE
 48:4.8mm
 61:6.1mm
 54:5.4mm

RoHS Compliant

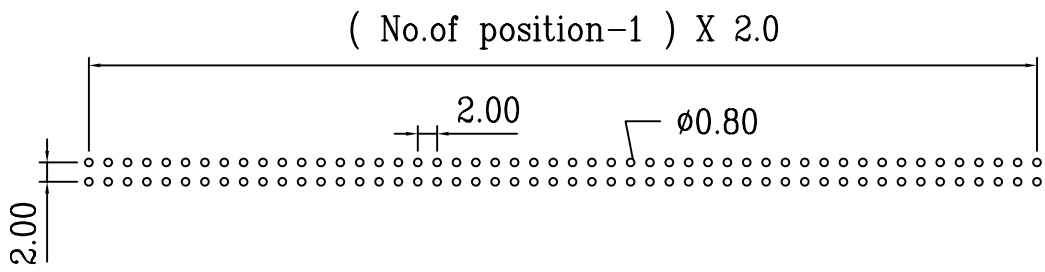

P.C.B.layout



煜倫股份有限公司

PART NO. S-R73xx-2Xxx		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION: 2.0mm Female Socket h=4.9mm Right Angle type				
DWG NO. S-R73xx-2Xxx					DRAWING BY	AREA	REVISIONS	HK
FILE NO.		PROJECTION						
UNIT / mm	SCALE 1:1							