


1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A


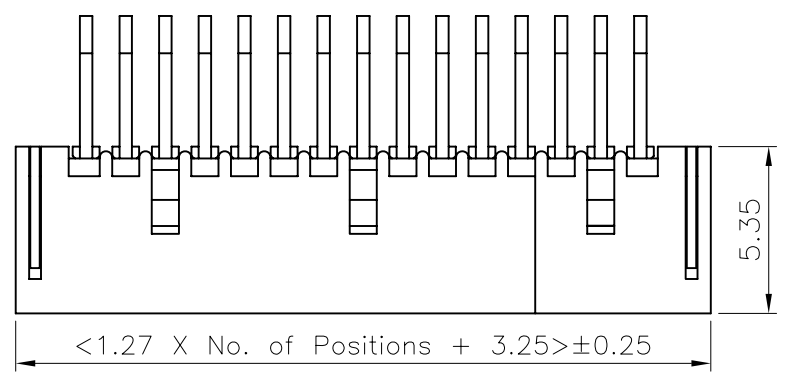


Specifications

Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials


Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T(Processing temp.260°C,10sec)
 All the materials must be GP materials

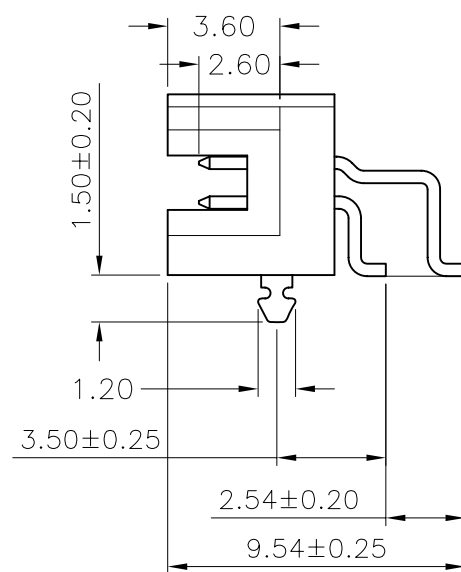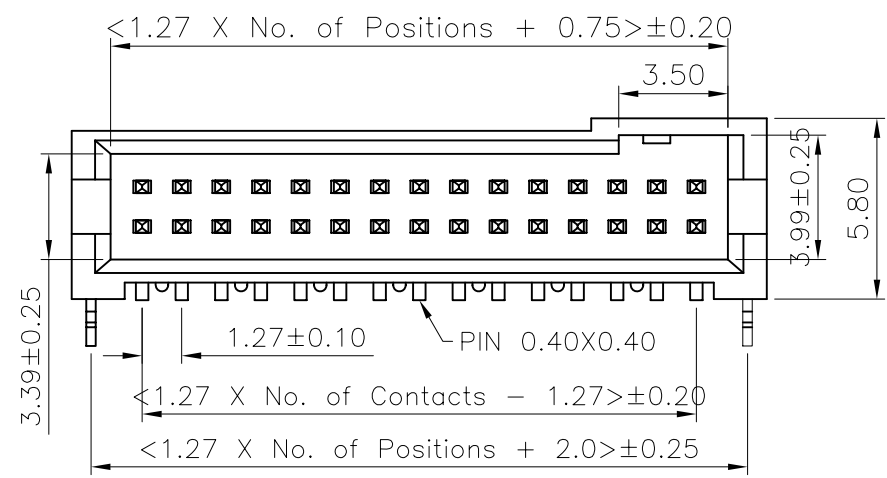

PAB-WZ-2Xxx-LF
 LEADFREE
 No. of Pins per Row
 05.08.10.15
 20.22.24.30

RoHS Compliant

RECOMMENDED P.C.BOARD LAYOUT
 (Tolerance:±0.05)

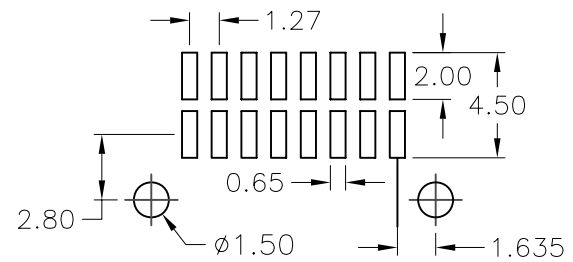

PART NO. PAB-WZ-2Xxx

DWG NO. PAB-WZ-2Xxx

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

1.27 BOX HEADER DUAL ROWS SMT TYPE
 SIDE ENTRY

煜倫股份有限公司

FILE NO.

DRAWING BY

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

AREA

REVISIONS

HK

DATE

UNIT / mm

SCALE 1:1

PROJECTION